


Number of contacts

6-64

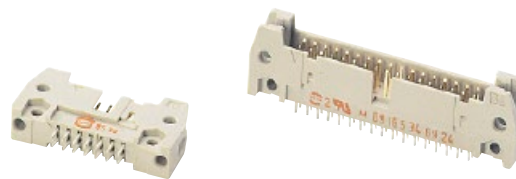

Male header with straight solder pins

Identification	No. of contacts	Part number			
		Without levers	With short levers	With long levers	
Male header with straight solder pins Length: 2.9 mm	6	09 18 506 □ 924	09 18 506 □ 914	09 18 506 □ 904	
	10	09 18 510 □ 924	09 18 510 □ 914	09 18 510 □ 904	
	14	09 18 514 □ 924	09 18 514 □ 914	09 18 514 □ 904	
	16	09 18 516 □ 924	09 18 516 □ 914	09 18 516 □ 904	
	20	09 18 520 □ 924	09 18 520 □ 914	09 18 520 □ 904	
	24	09 18 524 □ 924	09 18 524 □ 914	09 18 524 □ 904	
	26	09 18 526 □ 924	09 18 526 □ 914	09 18 526 □ 904	
	30	09 18 530 □ 924	09 18 530 □ 914	09 18 530 □ 904	
	34	09 18 534 □ 924	09 18 534 □ 914	09 18 534 □ 904	
	40	09 18 540 □ 924	09 18 540 □ 914	09 18 540 □ 904	
	50	09 18 550 □ 924	09 18 550 □ 914	09 18 550 □ 904	
	60	09 18 560 □ 924	09 18 560 □ 914	09 18 560 □ 904	
	64	09 18 564 □ 924	09 18 564 □ 914	09 18 564 □ 904	
	Male header with straight solder pins Length: 4.5 mm	6	09 18 506 □ 922*	09 18 506 □ 912*	09 18 506 □ 902*
		10	09 18 510 □ 922*	09 18 510 □ 912*	09 18 510 □ 902*
14		09 18 514 □ 922*	09 18 514 □ 912*	09 18 514 □ 902*	
16		09 18 516 □ 922*	09 18 516 □ 912*	09 18 516 □ 902*	
20		09 18 520 □ 922*	09 18 520 □ 912*	09 18 520 □ 902*	
24		09 18 524 □ 922*	09 18 524 □ 912*	09 18 524 □ 902*	
26		09 18 526 □ 922*	09 18 526 □ 912*	09 18 526 □ 902*	
30		09 18 530 □ 922*	09 18 530 □ 912*	09 18 530 □ 902*	
34		09 18 534 □ 922*	09 18 534 □ 912*	09 18 534 □ 902*	
40		09 18 540 □ 922*	09 18 540 □ 912*	09 18 540 □ 902*	
50		09 18 550 □ 922*	09 18 550 □ 912*	09 18 550 □ 902*	
60		09 18 560 □ 922*	09 18 560 □ 912*	09 18 560 □ 902*	
64		09 18 564 □ 922*	09 18 564 □ 912*	09 18 564 □ 902*	

SEK

08
08

Kinked version on request

* Not normally kept in stock
For accessories see page 08.16
For dimensions see page 08.09

For performance level 3 please specify digit 7*
For performance level 2 please specify digit 6*
S4 = 0.76 µm (30 µinch) Au or PdNi equivalent 5*

