


NOTE.

- 1. 材質及び処理 : ステンレス鋼 (≠2)
MATERIAL AND FINISH. STAINLESS STEEL
- 2. 推奨使用ケーブル外径 : 4.3±0.2
CABLE O.D
- 3. 推奨ケーブルクランプカシメ外径 :
SHIELD CAULKING O.D

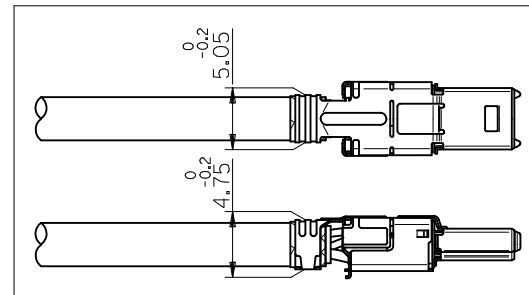

- 4. 本製品のケーブルクランプ部のグラッドはフレームグラッドを目的としており、シグナルグラッドとしての機能は保証致しません。
- 5. メッキ仕様 : ニッケルメッキ 1~3 μm
PLATING SPEC NICKEL

59744-1411	59744-1411
MATERIAL NO.	MODEL NO.

59744-1411
TRAY PACKAGE
オーダー番号 ORDER NO.

RELEASED EC NO: J2010-2025 DRWNR: KAKATA CHKD: JMARONEY APPR: MYAGI	2010/04/08 2010/04/09 2010/04/13	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
		10 UNDER	±0.2	MM ONLY	---	METRIC		
		10 OVER 30 UNDER	±0.25	DRAWN BY	DATE	TITLE	0.5 I/O CONN REC 14PIN SHIELD	
		30 OVER	±0.3	CHECKED BY	DATE	JMARONEY 2010/04/09		
ANGULAR	±3 °	APPROVED BY	DATE	MOLEX INCORPORATED		MATERIAL NO.	DOCUMENT NO.	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MYAGI	2010/04/13	SEE CHART		SD-59744-002	SHEET NO.	
		SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					1 OF 1