



SPECIFICATION FOR APPROVAL




TO: _____

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER		DELTA MODEL	10BENG3G	
ORDER P/N.	10BENG3G		SAMPLE ISSUE DATE		

1. PHYSICAL DIMENSIONS:

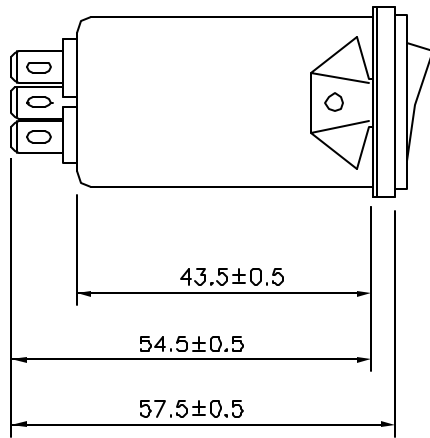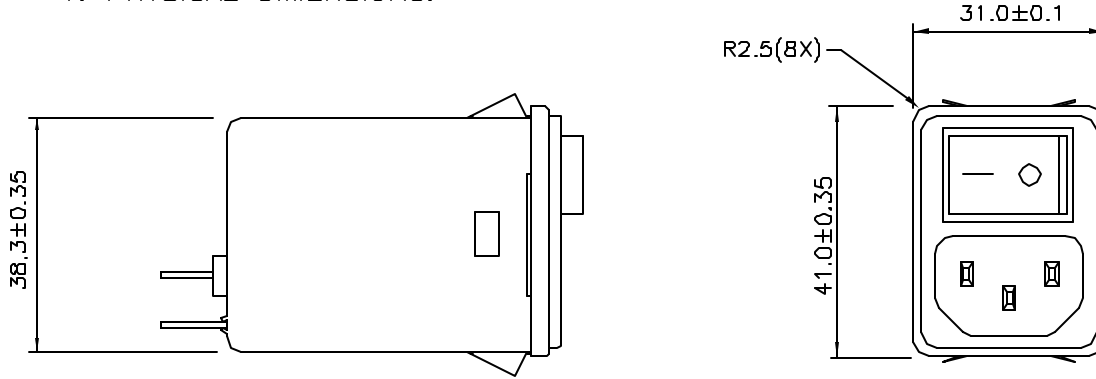


SUGGESTED MOUNTING CUTOUT
(MOUNTING FROM FRONT)

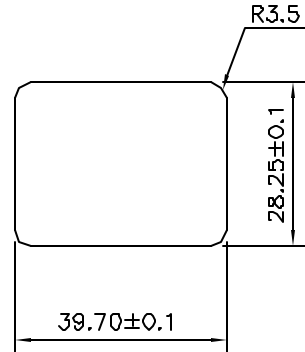

UNIT: mm

2. SCHEMATIC:

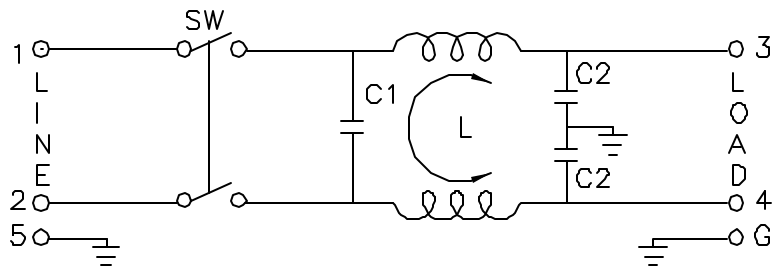

L: 0.3mH
C1: 0.1uF
C2: 2200pF

REPORT BY	CHECKED BY	APPROVED BY	UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCE DECIMALS .X± .XX± ANGLES±		
			REV.	99.12.10	

DELTA ELECTRONICS, INC.

186 RUEY KUANG ROAD, NEIHU, TAIPEI 114,
TAIWAN, R.O.C.
TEL:886-2-87972088 FAX:886-2-87972120

SPECIFICATION FOR APPROVAL



TO: _____

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER			DELTA MODEL	10BENG3G
ORDER P/N.	10BENG3G			SAMPLE ISSUE DATE	

3. ELECTRICAL CHARACTERISTICS:

3-1. VOLTAGE RATING 115/250VAC

3-2. CURRENT RATING

- A. AT 115VAC 10 A RMS Max.
- B. AT 250VAC 10 A RMS Max.

3-3. OPERATING FREQUENCY..... 50/60 Hz

3-4. LEAKAGE CURRENT: EACH LINE TO GROUND

- A. @115VAC 60Hz 0.20 mA Max.
- B. @250VAC 50Hz 0.40 mA Max.

3-5. HIPOT RATING (FOR ONE MINUTE)

- A. LINE TO GROUND 2250VDC
- B. LINE TO LINE 1450VDC

3-6. TEMPERATURE RANGE: -25 TO +85 DEGREE C

3-7. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	/	1	4	5	10	20	30	35	35
DIF. MODE dB	/	/	2	4	10	12	30	35	35

3-8. SAFETY

REV.	2. 01.04.16	
	1. 99.12.10	

DELTA ELECTRONICS, INC.

186 RUEY KUANG ROAD, NEIHU. TAIPEI 114,
TAIWAN, R.O.C.
TEL:886-2-87972088 FAX:886-2-87972120