
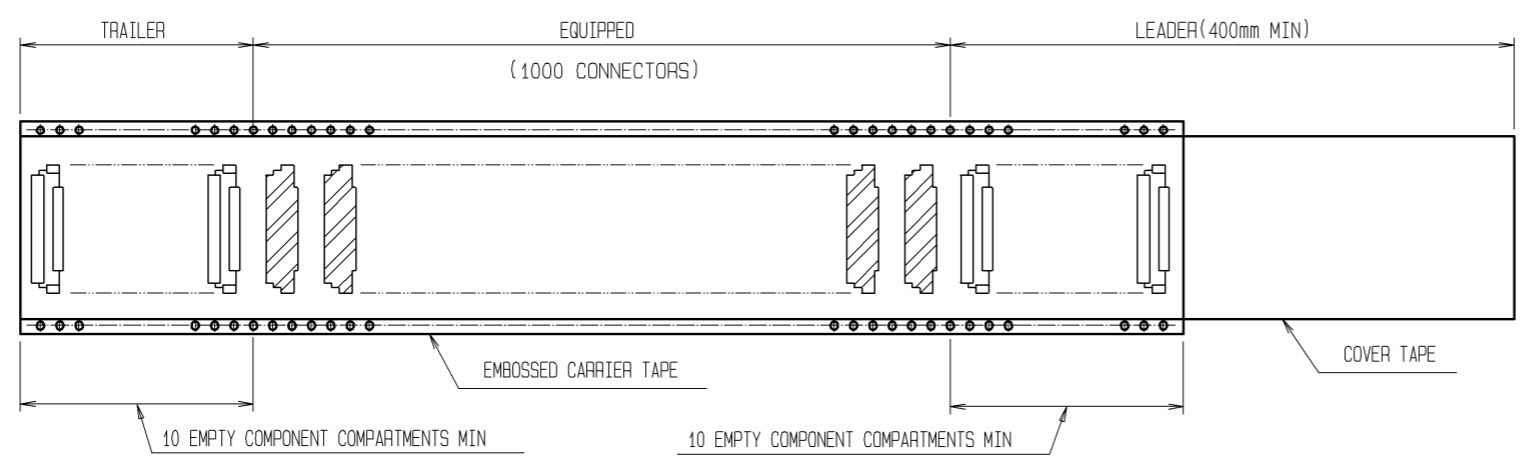
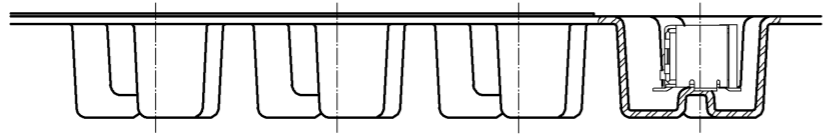
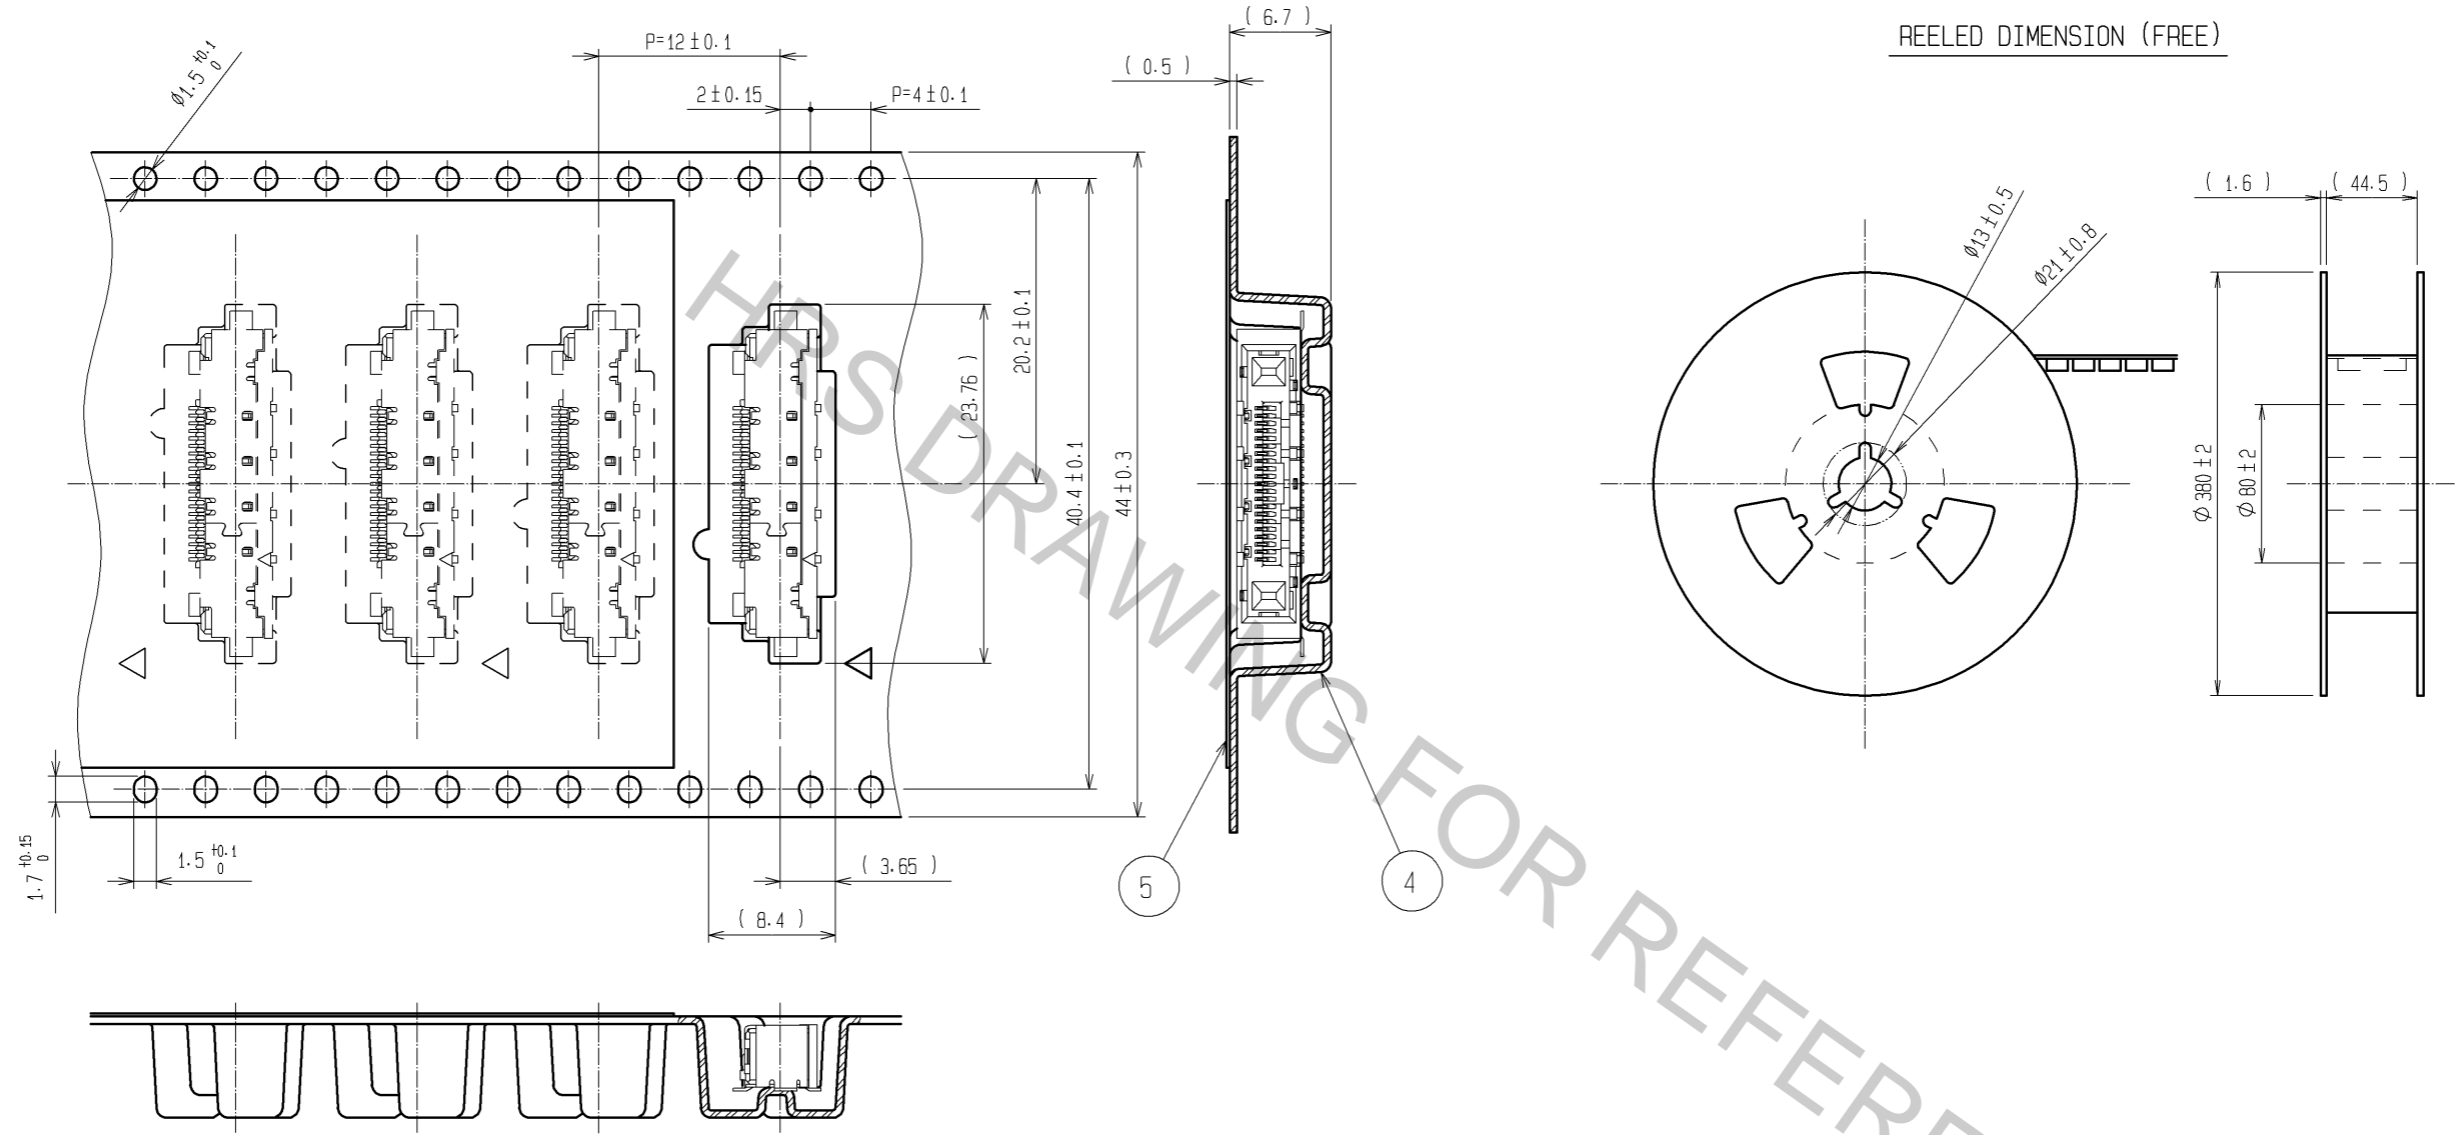


- NOTE 1 LEAD CO-PLANARITY OF THIS PRODUCT TO BE 0.1MAX.  
 2 AREA OF INNER SMT LAND REQUIRES PATTERN PROHIBITION OR RESIST TREATMENT TO PREVENT THE PATTERN TOUCHING TO THE CONTACTS.  
 3 ( ) INDICATES A REFERENCE DIMENSION.  
 4 MANUFACTURING PROCESS COULD LEAVE SCRATCH AND/OR PUNCH MARKS HAVING NO AFFECT ON THE PRODUCT PERFORMANCE.  
 5 PACKAGING FOR THIS PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKAGING. SEE SHEET 2/2 FOR DETAILS.

5	PE	(COVER TAPE)						
4	PS	(EMBOSSD CARRIER TAPE)						
2	PHOSPHOR BRONZE	OVER PLATING:TIN PLATING 1#m min UNDER PLATING:NICKEL 0.2#m min						
1	LCP	BLACK, UL94V-0						
3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1#m min LEAD AREA:GOLD 0.03#m min UNDER PLATING:NICKEL 1#m min						
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		5 : 1	1	DIS-F-002932		KN. SHIBUYA	HT. YAMAGUCHI	08.03.27
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	08.01.24	DRAWING NO.		EDC3-157339-00		
		CHECED : HT. YAMAGUCHI	08.01.24	PART NO.		FX16-21S-0.5SH		
		DESIGNED : KN. SHIBUYA	08.01.24	CODE NO.		CL575-3411-5-00		
		DRAWN : KN. SHIBUYA	08.01.24					

DRAWING FOR PACKING(2:1)

THE DIRECTION OF PULLING OUT



<b>HRS</b>	DRAWING NO.	EDC3-157339-00	2/2
	PART NO.	FX16-21S-0.5SH	
	CODE NO.	CL575-3411-5-00	

Apr.1.2017 Copyright 2017 HIROSE ELECTRIC CO., LTD. All Rights Reserved.