
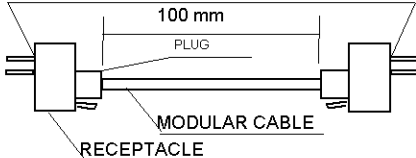



| APPLICABLE STANDARD | | | | | |
|--|---|---|---------------------------|-----------------------|------------------------------|
| RATING | OPERATING TEMPERATURE RANGE | -25 °C TO +80 °C | STORAGE TEMPERATURE RANGE | - °C TO -°C | |
| | VOLTAGE | AC 125 V | CURRENT | 0.5 A | |
| SPECIFICATIONS | | | | | |
| ITEM | TEST METHOD | REQUIREMENTS | QT | AT | |
| CONSTRUCTION | | | | | |
| GENERAL EXAMINATION | VISUALLY AND BY MEASURING INSTRUMENT. | ACCORDING TO DRAWING. | <input type="radio"/> | <input type="radio"/> | |
| MARKING | CONFIRMED VISUALLY. | | <input type="radio"/> | <input type="radio"/> | |
| ELECTRIC CHARACTERISTICS | | | | | |
| CONTACT RESISTANCE | 100 mA DC (OR 1000 Hz AC). MEASUREMENT POINTS SHALL BE AS FOLLOWS. TEST POINT  (ONE EXAMPLE CONNECTOR CONFIGURATION IS SHOWN.) | 230 mΩ MAX. | <input type="radio"/> | <input type="radio"/> | |
| INSULATION RESISTANCE | 100 V DC. | 100 MΩ MIN. | <input type="radio"/> | <input type="radio"/> | |
| VOLTAGE PROOF | 500 V AC FOR 1 min. | NO FLASHOVER OR BREAKDOWN. | <input type="radio"/> | <input type="radio"/> | |
| MECHANICAL CHARACTERISTICS | | | | | |
| MECHANICAL OPERATION | 200 TIMES INSERTIONS AND EXTRACTIONS. | 1) CONTACT RESISTANCE: 250 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PARTS. | <input type="radio"/> | - | |
| VIBRATION | FREQUENCY 10 TO 55 Hz SINGLE AMPLITUDE 0.75 mm, - m/s ² AT 2 h, FOR 3 DIRECTIONS. | 1) NO ELECTRICAL DISCONTINUITY OF 5μs. 2) CONTACT RESISTANCE: 250 mΩ MAX. 3) NO DAMAGE, CRACK AND LOOSENESS OF PARTS. | <input type="radio"/> | - | |
| SHOCK | 490 m/s ² DIRECTIONS OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS. | | <input type="radio"/> | - | |
| ENVIRONMENTAL CHARACTERISTICS | | | | | |
| DAMP HEAT,CYCLIC | EXPOSED AT +40 °C, 90 TO 95 %, 500 h. | 1) CONTACT RESISTANCE: 250 mΩ MAX. 2) INSULATION RESISTANCE: 1 MΩ MIN. (AT HIGH HUMIDITY) 10 MΩ MIN. (AT DRY) 3) NO DAMAGE, CRACK AND LOOSENESS OF PARTS. | <input type="radio"/> | - | |
| RAPID CHANGE OF TEMPERATURE | TEMPERATURE -55±3 → 5 TO 35 → 85±2 → 5 TO 35 °C TIME 30 TO 35 → 5 MAX → 30 TO 35 → 5 min MAX UNDER 5 CYCLES. | 1) CONTACT RESISTANCE: 250 mΩ MAX. 2) INSULATION RESISTANCE: 100 MΩ MIN. 3) NO DAMAGE, CRACK AND LOOSENESS OF PART | <input type="radio"/> | - | |
| CORROSION SALT MIST | EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h. | 1) CONTACT RESISTANCE: 250 mΩ MAX. 2) NO HEAVY CORROSION. | <input type="radio"/> | - | |
| RESISTANCE TO SOLDERING IRON HEAT | SOLDERRING IRON TEMPERATURE, 350 ± 10 °C SOLDERRING TEMPERATURE 4 s MAX. | | | | |
| | | | | | |
| | COUNT | DESCRIPTION OF REVISIONS | DESIGNED | CHECKED | DATE |
| | 0 | | | | |
| REMARK | | | APPROVED | HO.MIWA | 06.01.17 |
| | | | CHECKED | YH.ENAMI | 06.01.17 |
| | | | DESIGNED | TU.TANIGUCHI | 06.01.17 |
| Unless otherwise specified, refer to JIS C 5402. | | | DRAWN | MT.ITANO | 06.01.17 |
| Note QT:Qualification Test AT:Assurance Test X:Applicable Test | | | DRAWING NO. | ELC4-122138-01 | |
| HRS | SPECIFICATION SHEET | | PART NO. | TM18R-T0-88 (50) | |
| | HIROSE ELECTRIC CO., LTD. | | CODE NO. | CL222-2883-9-50 | <input type="checkbox"/> 1/2 |

REFLOW CONDITION

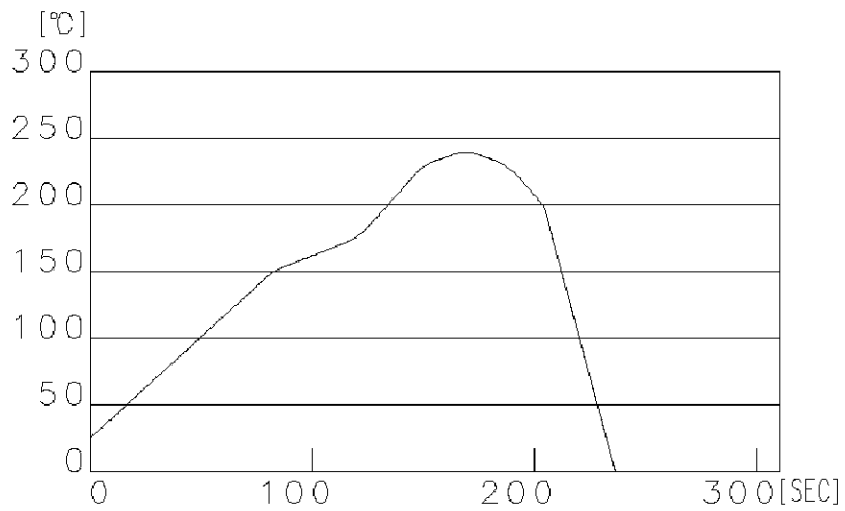

| TEMPERATURE RANGE | TIME |
|-------------------|--------|
| 150 TO 180 | 60 SEC |
| 200 MIN | 55 SEC |
| 220MIN | 40 SEC |
| 230MIN | 30 SEC |
| 235 MIN | 20 SEC |
| 240 | MOMENT |

| COUNT | DESCRIPTION OF REVISIONS | DESIGNED | CHECKED | DATE |
|--|---------------------------|-------------|----------|---|
| 0 | | | | |
| REMARK | | | APPROVED | HO.MIWA 06.01.17 |
| | | | CHECKED | YH.ENAMI 06.01.17 |
| | | | DESIGNED | TU.TANIGUCHI 06.01.17 |
| | | | DRAWN | MT.ITANO 06.01.17 |
| Unless otherwise specified, refer to JIS C 5402. | | | | |
| Note QT:Qualification Test AT:Assurance Test X:Applicable Test | | DRAWING NO. | | ELG4-122138-01 |
| HRS | SPECIFICATION SHEET | | PART NO. | TM18R-T0-88 (50) |
| | HIROSE ELECTRIC CO., LTD. | | CODE NO. | CL222-2883-9-50 |
| | | | |  2/2 |