


# HC-B 10-KML-73/O1M25

Order No.: 1604743



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1604743>

HEAVYCON coupling housing B10, with single locking latch, height 52 mm, with support 1x M25

Commercial data	
GTIN (EAN)	 4 017918 882037
sales group	D002
Pack	10 pcs.
Customs tariff	85389099
Catalog page information	Page 483 (PC-2009)

### Product notes

WEEE/RoHS-compliant since:  
03/01/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

General data	
Note	For contact inserts HC-B10, BB18, DD42, M, K8/24
Design	B10
Height	73 mm
Width	43 mm
Length	73 mm

Housing type	Coupling housings
Locking type	With single locking latch
Type of the screw connection	1x M25
Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 125 °C
Housing material	Aluminum, die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Material lock	High-grade steel, handle: PA-GF
Material grip body interlock	PA-GF

### Certificates / Approvals




Certification

GOST

### Diagrams/Drawings

Dimensioned drawing

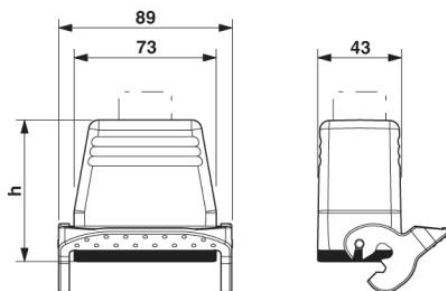

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;