

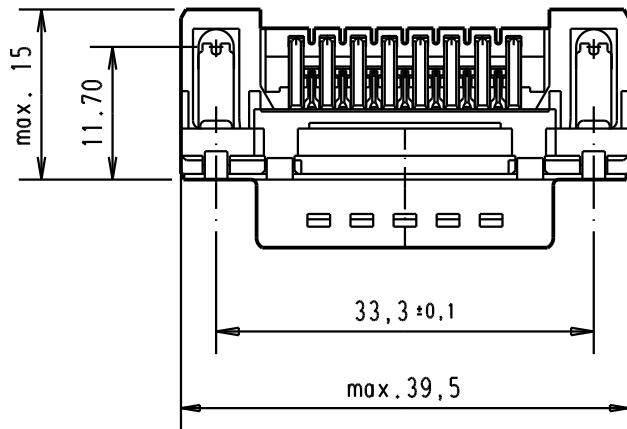
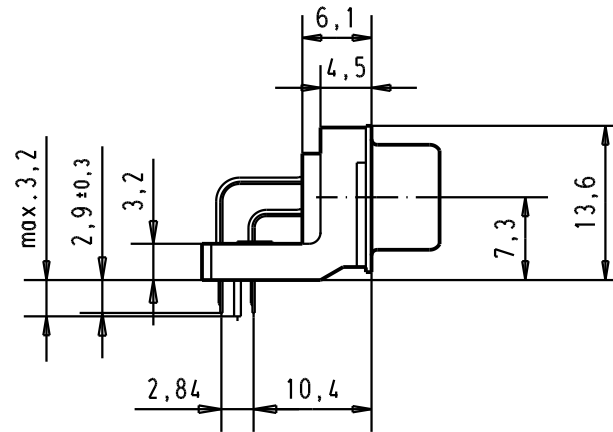


5 4 3 2 1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

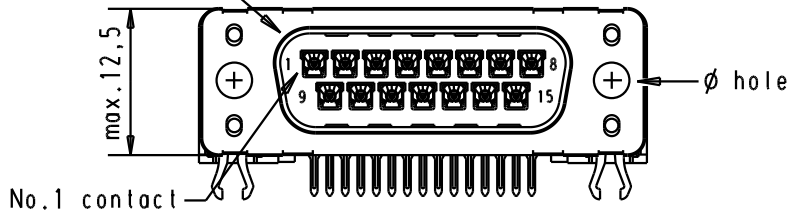

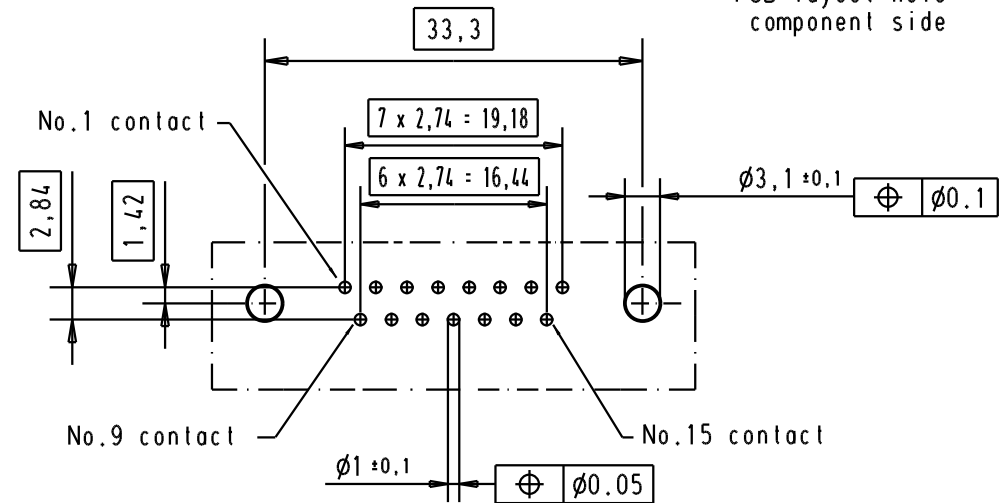

PCB layout hole component side



Connector retention and insertion forces on the PCB = 25 / 80 newtons

A

						Det.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, standard angle, 15 poles, with solder pin, hole and grounding board lock	Moßstab/ Scale
						Insp.				1.5:1
						Stand.				
			31892	22/04/04	JH					
09 65 263 3810	3.1 ± 0.1	1	31084	04/09/02	YT					
09 65 263 6810	3.1 ± 0.1	2	29689	03/07/01	AA					
09 65 263 7810	3.1 ± 0.1	3	27960	18/dec/00	ALSPACE					
Part number	ø hole	Performance level	Mod.	Dat.	Name	HARTING EURL F-95972 Paris			TB 0965263x81x	Blatt/ Page 1 /
									Sub.	