

5



4

3



2

1

Mating face according to : MIL-C-24308 / DIN 41652 / CECC 75301-802

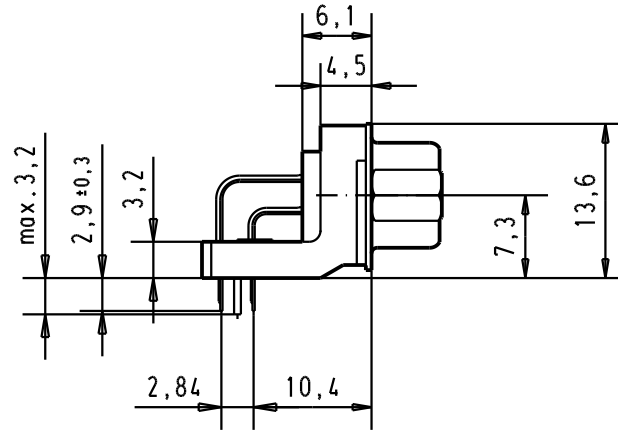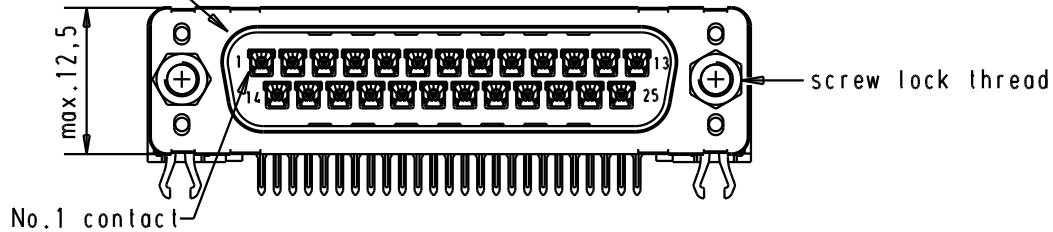

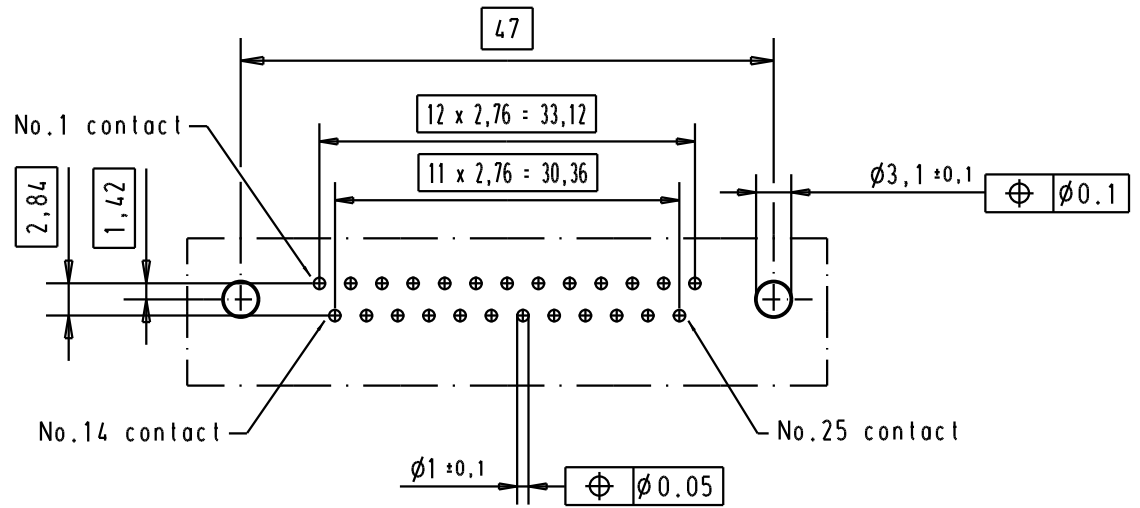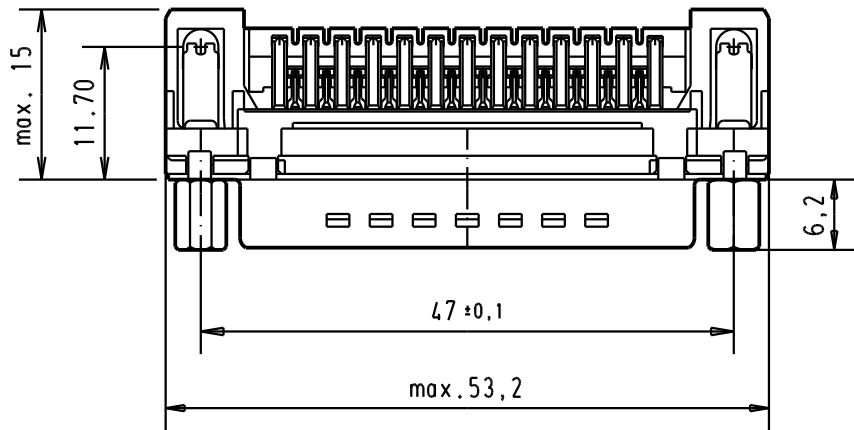

PCB layout hole component side



Connector retention and insertion forces on the PCB = 25 / 80 newtons

A

09 65 363 3833	M3	1																	
09 65 363 6833	M3	2																	
09 65 363 7833	M3	3																	
09 65 363 3813	4-40 UNC	1																	
09 65 363 6813	4-40 UNC	2	31892	22/04/04	JH														
09 65 363 7813	4-40 UNC	3	31084	04/09/02	YT														
Part number	Screw lock thread	Performance level	Mod.	Dat.	Name	Dol. Name Detail. 04/09/02 YT Insp. Stand.		 All Dim. in mm Orig. Size DIN A 4		D-Sub, male, standard angle, 25 poles, with solder pin, screw lock grounding board lock			Maßstab/ Scale 1.5:1						
						HARTING EUROL F-95972 Paris				TB 0965363x8x3			Blatt/ Page 1 /						
										Sub.									