

RECOMMENDED PCB LAYOUT
SCALE = 2 : 1

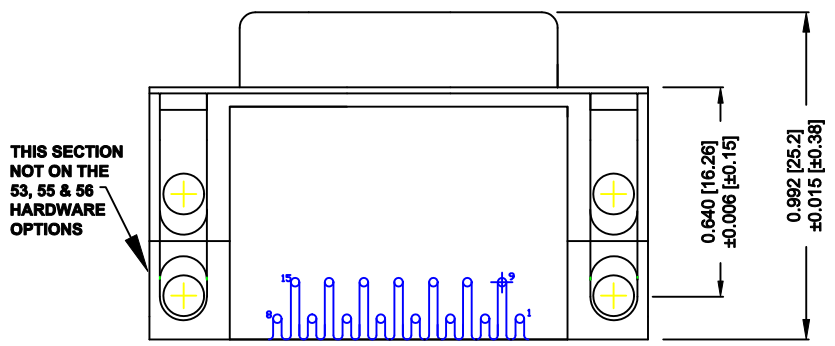
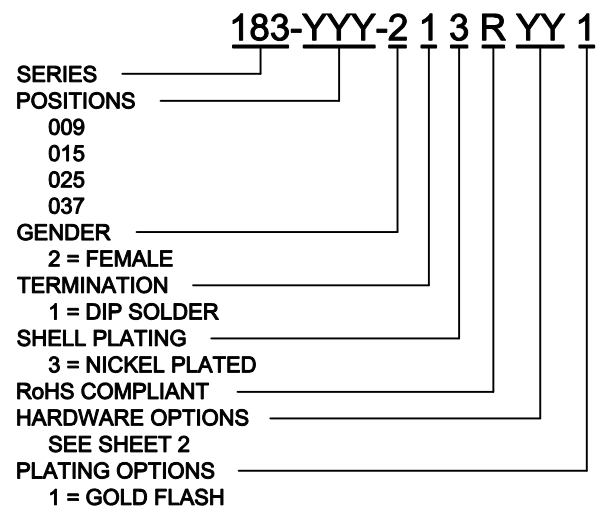
MATERIALS:

- SHELL: SPCC, NICKEL PLATED
- INSULATOR: BLACK PA9T NYLON, UL 94-O
- CONTACTS: BRASS, GOLD PLATED
- RIVET: COPPER ALLOY, NICKEL PLATED
- SCREWLOCK: ZINC ALLOY, NICKEL PLATED
- BOARDLOCK: SPCC, TIN PLATED

ELECTRICAL:

- CURRENT RATING: 5 AMPS
- INSULATOR RESISTANCE: 1,000 MEGOHMS Min.
- DIELECTRIC WITHSTANDING: 1,000VAC RMS
- TEMPERATURE: -55° C to +105° C

No. OF PINS	DIMENSIONS		
	A	B	C
9	1.213	0.984	0.642
	30.81	24.99	16.30
15	1.541	1.312	0.971
	39.14	33.32	24.65
25	2.088	1.852	1.512
	53.04	47.04	38.40
37	2.729	2.500	2.157
	69.32	63.50	54.80











BOTTOM VIEW


RoHS COMPLIANT

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: PAM JENKINS	DATE: 4-28-05
			CHECKED:	DATE:
NorComp	SCALE: 1 : 1	SHEET 1	OF 2	REV 10
	DWG NO. 183-YYY-213RYY1			

	 0.141 ±0.020 METAL SHELL WITH INSIDE GROUND STRAPS	 METAL SHELL	 METAL SHELL FORK BOARD LOCKS	 0.500 METAL SHELL FORK BOARD LOCKS
 0.120" DIA. HOLE	16	N/A	N/A	55
 4-40 FLUSH INSERT	17	45	57 BOARD LOCKS IN REAR HOLE (0.590")	53 BOARD LOCKS IN FRONT HOLE (0.590")
 4-40 HEX STANDOFF FEMALE SCREWLOCK	18	48	54 BOARD LOCKS IN REAR HOLE	56 BOARD LOCKS IN FRONT HOLE
 4-40 ROUND STANDOFF FEMALE SCREWLOCK	N/A	N/A	N/A	N/A

DO NOT SCALE FROM DRAWING

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 8-23-98
			CHECKED:	DATE:
NorComp		SCALE:	SHEET 2 OF 2	REV 10
		DWG NO. 183-YYY-213RYY1		

RoHS COMPLIANT