


Number of contacts

9-50

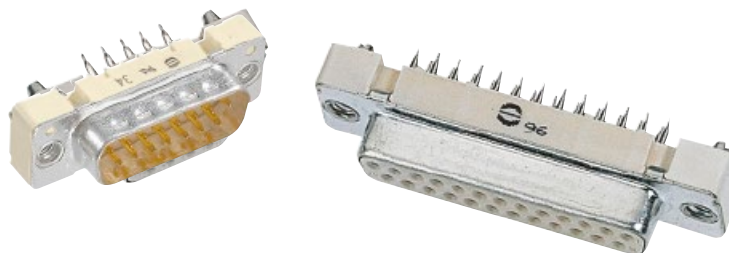

Press-in, straight with grounding press-in board locks

D-Sub

| Identification | No. of contacts | Part number | |
|--|---------------------------|---|---|
| Performance levels Explanations see page 05.171 Other performance levels on request | | Performance level 3 | Performance level 2 |
| Male connector Flange height x = 5.7 mm metal shell with dimples Please insert digit for flange thread or fitted female screw locks M3 ▶ 5 4-40 UNC ▶ 6 fitted screw locks 4-40 UNC ▶ 7 ¹⁾ | 9 15 25 | 09 66 164 771 . 09 66 264 771 . 09 66 364 771 . | 09 66 164 671 . 09 66 264 671 . 09 66 364 671 . |
| Female connector Flange height x = 5.7 mm metal shell Please insert digit for flange thread or fitted female screw locks M3 ▶ 5 4-40 UNC ▶ 6 fitted screw locks 4-40 UNC ▶ 7 ¹⁾ | 9 15 25 37 | 09 66 154 751 . 09 66 254 751 . 09 66 354 751 . 09 66 454 751 . | 09 66 154 651 . 09 66 254 651 . 09 66 354 651 . 09 66 454 651 . |
| Female connector Flange height x = 6 mm metal shell Please insert digit for flange thread or fitted female screw locks M3 ▶ 1 4-40 UNC ▶ 2 fitted screw locks 4-40 UNC ▶ 3 ¹⁾ | 9 15 25 37 50 | 09 66 154 751 . 09 66 254 751 . 09 66 354 751 . 09 66 454 751 . 09 66 554 751 . | 09 66 154 651 . 09 66 254 651 . 09 66 354 651 . 09 66 454 651 . 09 66 554 651 . |

¹⁾ Fitted screw locks 4-40 UNC not normally kept in stock for performance level 3
 Connector dimensions see page 05.173. Mating conditions see page 05.171.