THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
© COPYRIGHT – By – ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECO-18-008015	24MAY2018	AP	DG

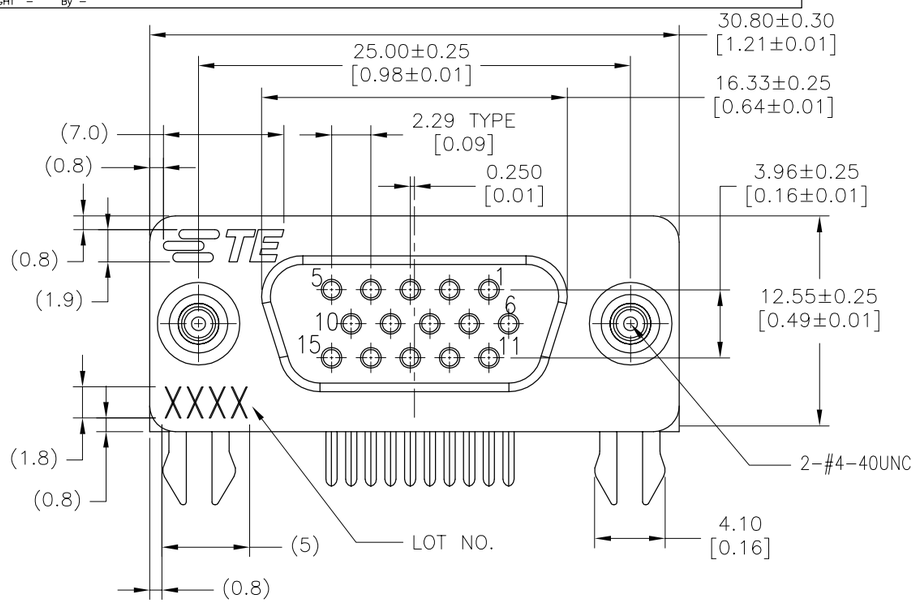

RECOMMENDED P.C.B LAYOUT(TOP SIDE)
(PCB BOARD TOLERANCE±0.05)

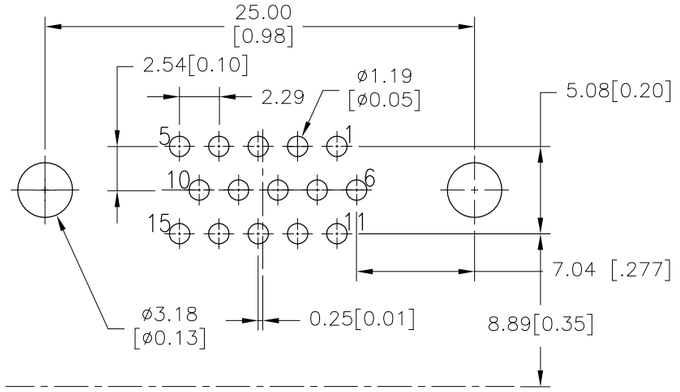

NOTES:

INSULATOR:PA9T+G.F UL94V-0 BLACK
CONTACT:PHOSPHOR BRONZE
" GOLD PLATING ON CONTACT AREA
100u" MATTE TIN PLATING ON SOLDERTAIL
50u" NICKEL UNDERPLATED OVERALL
HOLDDOWN:BRASS,100u" TIN OVER 50u" NICKEL
SHEEL:SPCC,50u" NICKEL PLATING OVERALL
SCREWLOCK:BRASS,30u" NICKEL PLATING OVERALL

LOT NUMBER "XXXX"
STANDS FOR CALENDAR YEAR
STANDS FOR WEEK NUMBER

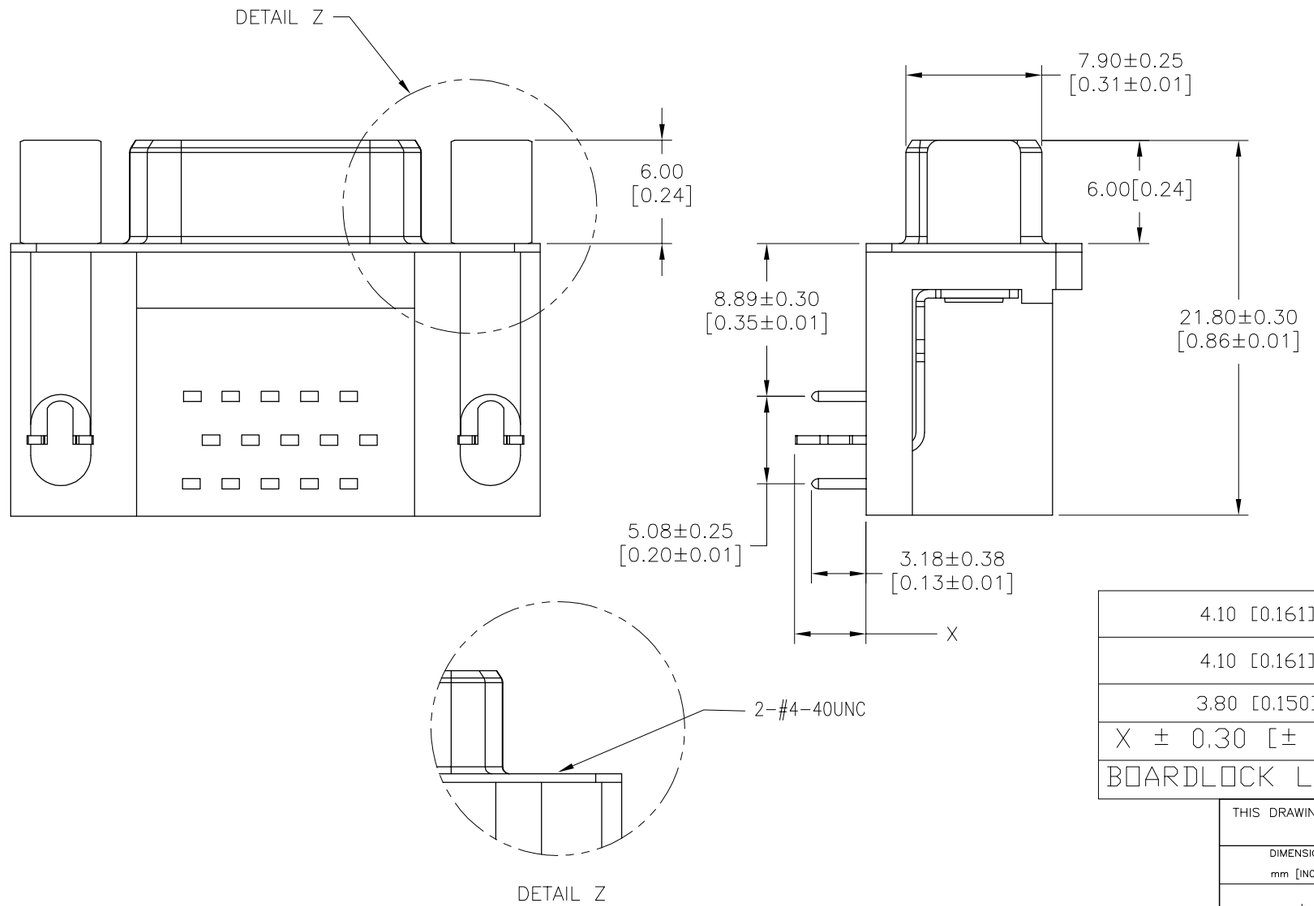

4.10 [0.161]	THREADED SEE DETAIL Z	30µ"Au	2311763-3
4.10 [0.161]	THREADED SEE DETAIL Z	Au Flash	2311763-2
3.80 [0.150]	YES	30µ"Au	2311763-1
X ± 0.30 [± 0.012]	SCREWLOCK	Contact Area	P/N
BOARDLOCK LENGTH		Plating	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± 0.40
2 PLC ± 0.25
3 PLC ± 0.15
4 PLC ± –
ANGLES ± 3°

MATERIAL –
FINISH –

DWN AJITH PAI 03MAR2017
CHK GORENC, DANIEL L 03MAR2017
APVD GORENC, DANIEL L 03MAR2017
PRODUCT SPEC 108-130023
APPLICATION SPEC –
WEIGHT

TE Connectivity

NAME AMPLIMITE RECEPTACLE, HD22, RIGHT ANGLE, 15P
–
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-2311763	–

CUSTOMER DRAWING | SCALE 1:1 | SHEET 1 OF 1 | REV D

2311763

1471-9 (1/15)