

See terminaison contact

TIN LEAD PART NUMBER


SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24B.PV00
15	39.14	33.32	25.18	25.12	19.18	D15P24B.PV00
25	53.03	47.04	39.12	38.84	33.12	D25P24B.PV00
37	69.32	63.50	55.68	55.30	49.68	D37P24B.PV00

Protection: 4 --> Flash AU  
6 --> 0.76µ AU


LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24B.PV00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24B.PV00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24B.PV00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24B.PV00LF


Protection: 4 --> Flash AU  
6 --> 0.76µ AU

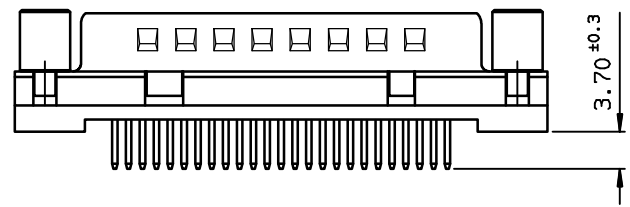

SECTION TERMINAISON CONTACT



PC card drilling dimensions(after plating)  
(thickness 2.40±0.20mm)

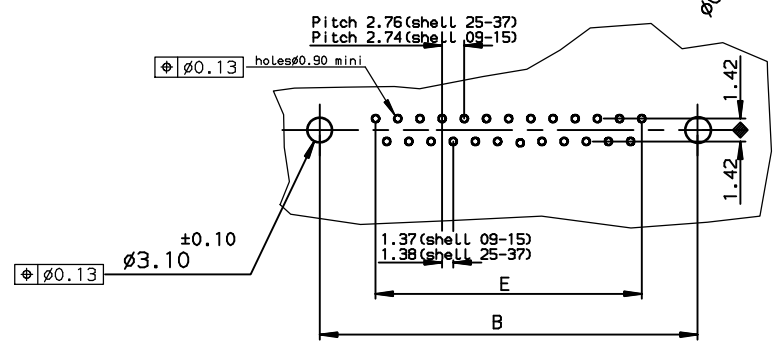

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C01-8646-0000

European Views

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	LELEON	1992/09/14	ANGULAR	size A3
Eng	PESSON	1992/09/14	LINEAR	Scale 2
Chr	LEGARE	1992/09/14	0.xx' ± 2'	ECN L506-0097
Appr	LEGARE	1992/09/14	Product family	Spec ref -
title MALE CONNECTOR DELTA D ST		D-Sub		Rev. F
straight,solder type for		C01-8646-0105		CUSTOMER sheet 1 of 1
catalog no				

rev	ecn no	dr	date
C	-	JAR	2002/09/10
D	LS05-001	MPE	2005/03/09
E	LS05-0056	MPE	2005/06/27
F	LS06-0097	LGO	2006/07/29
-	-	-	-
-	-	-	-
-	-	-	-