


PC board drilling dimensions(after plating)
(thickness ≤ 3.20±0.30mm)

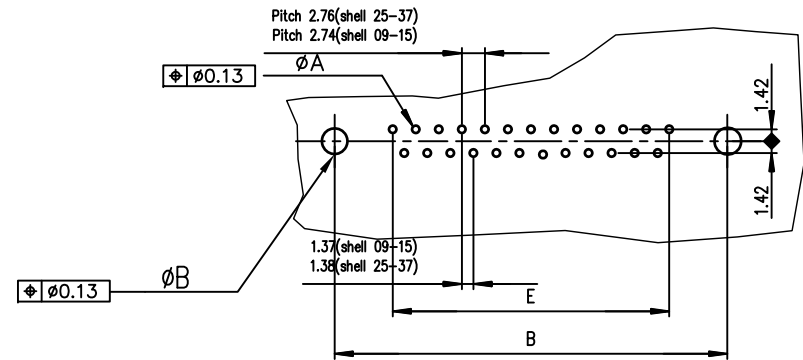

ROHS PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	Gold Flash	0.76µ Gold
09	30.81	24.99	16.96	16.21	10.96	D09S90C4GX00LF	D09S90C6GX00LF
15	39.14	33.32	25.18	24.54	19.18	D15S90C4GX00LF	D15S90C6GX00LF
25	53.03	47.04	39.12	38.25	33.12	D25S90C4GX00LF	D25S90C6GX00LF
37	69.32	63.50	55.68	54.71	49.68	D37S90C4GX00LF	D37S90C6GX00LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS;
SEE DRAWING C01-8646-0001

mat'l. code		surface ISO 1302		tolerance ISO 406 ISO 1101		projection		product family D-SUB	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title	
G	ELX-I-21654	AB	2015-10-26	angles	linear	.0±0.1	←	FEMALE DELTA-D LOW PROFILE STRAIGHT PRESS-FIT	
H	ELX-I-24020	AAB	2016-06-06	0'±2'		.00±0.1			
						.000±0.1	scale 2:1	dwg no sheet 1 of 1 size	
				dr	PESSON	1995-04-27	Amphenol FCI	C01-8646-0348 A3	
				engr	MITHUN PAUL	2016-06-06		type Product Customer Drawing	
				chr	ATHUL A.B	2016-06-06			
				appd	BIJU K PAUL	2016-06-06			
sheet index	revision sheet	H	1						