


NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 VSWR: 1.25:1 MAX.
- 1.3 IMPEDANCE: 50 OHMS
- 1.4 POWER: 2 WATTS AVG. AT +25°C
DERATED LINEARLY TO 0.5 WATTS AT +125°C
- 1.5 PEAK POWER: 0.25 KILOWATTS (5 MICRSECOND PULSE WIDTH).
- 1.6 OPERATING TEMP. RANGE: -54°C to +125°C

2.0 MARKING: MARK UNIT AS SHOWN
(REF.: INK-02611-27-18)

3.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.

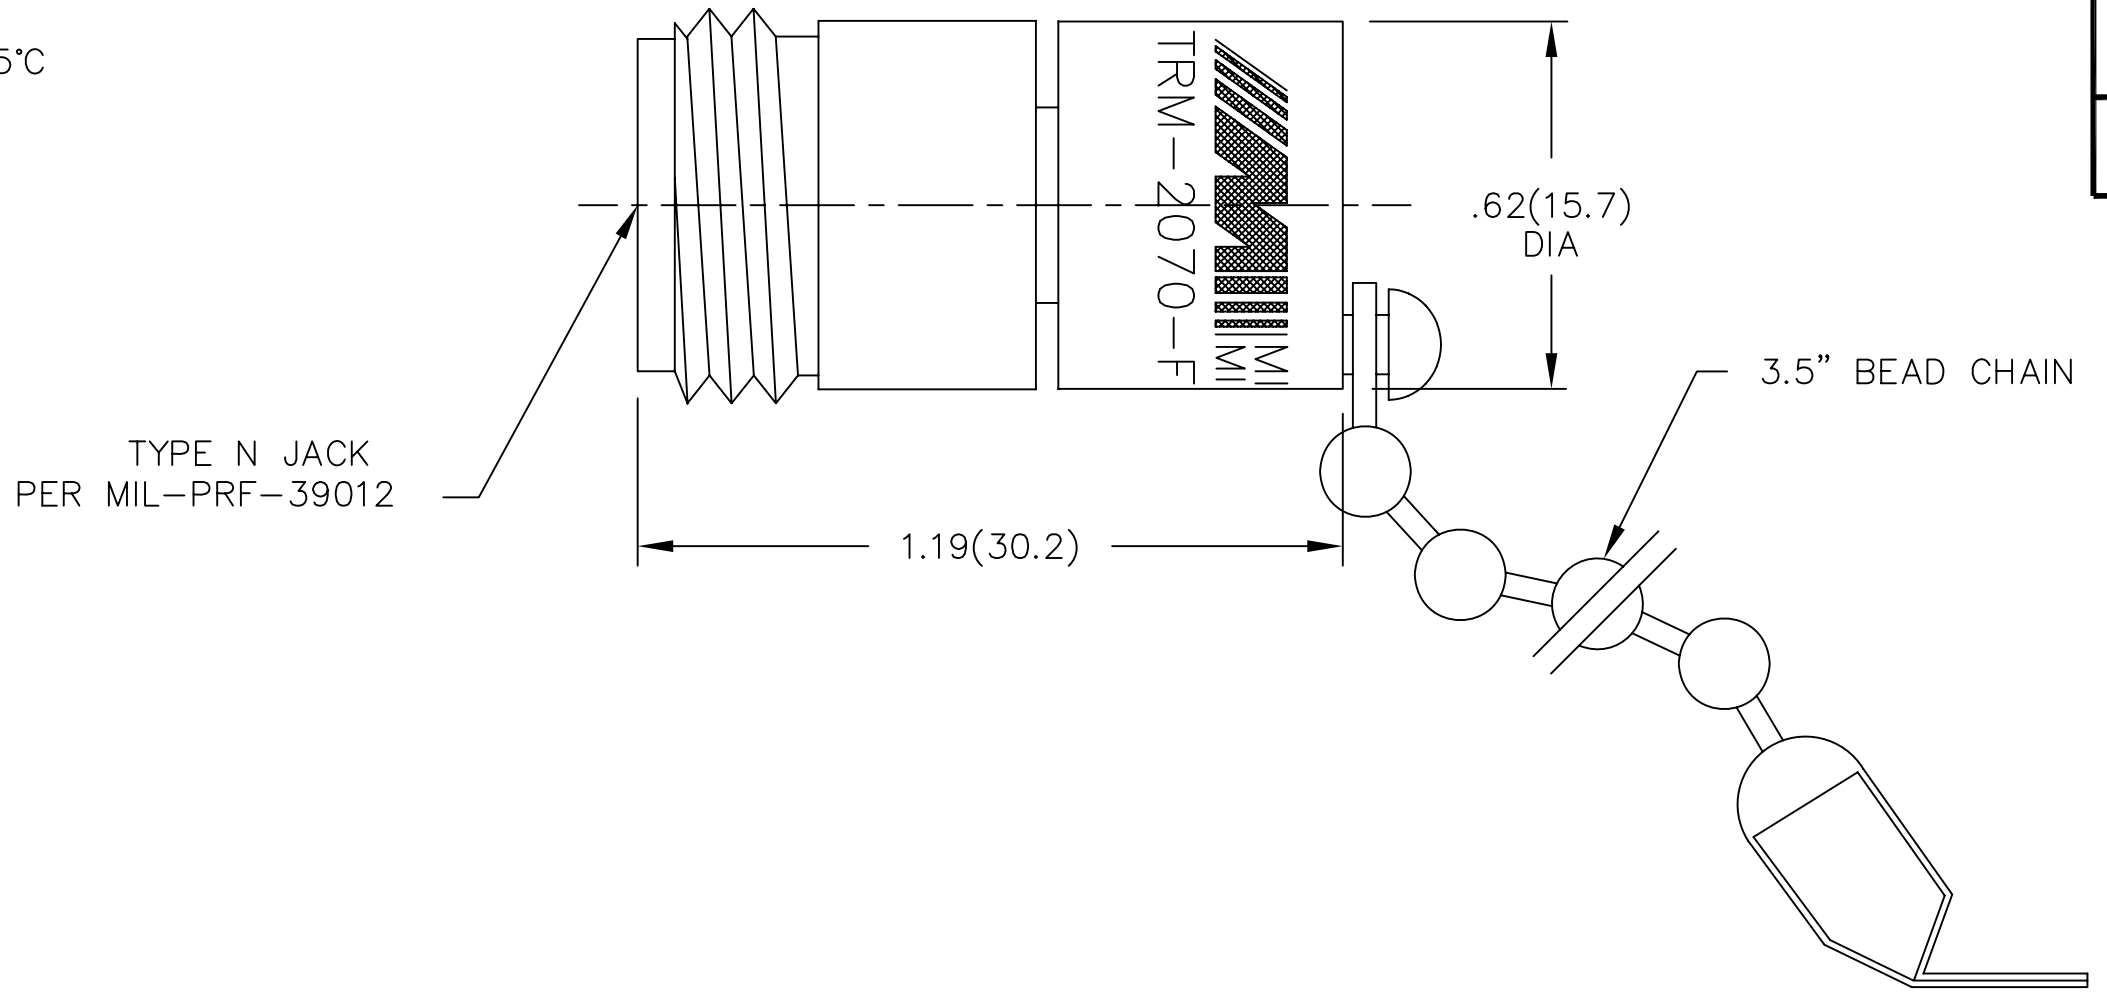

DWG NO. WAS: 05996-01-00

| REV. | DESCRIPTION | DATE |
|------|-------------------------|----------|
| - | RELEASED | 5/22/85 |
| A | ECR 6545 | 8/1/89 |
| B | ECR 7129 | 2/23/90 |
| C | CAD/UPDTE SPCS. & MRKNG | 8/4/93 |
| C1 | ADDED TITLEBLOCK | 10/27/05 |

| | | | | |
|---|---|---------------------------------|--------------------------------------|--------------|
| UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1' | FSCM NO. 34078 | MIDWEST MICROWAVE | | |
| | NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave | | TITLE TERMINATION | |
| | DRAWN/DATE A.BEATTY 8/4/93 | ENG./DATE G.KOZAK 8/10/93 | DRAWING NUMBER TRM-2070-FC-NNN-07 | |
| | CHECKED/DATE M.HOLLMAN 8/6/93 | APPROVED/DATE | SCALE: 3=1 | SHEET 1 of 1 |