

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION JAN , 2006.


© COPYRIGHT 2006 By -

ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | | | |
|-----|------|-----------|-----|---------------|-----------|-------|--------|
| | | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| E | B | | C | ECR-06-001518 | 25JAN06 | JMS | FWK |
| | | | D | ECO-11-010858 | 25MAY2011 | TITAN | MARTIN |

NOTES:

- ① PACK IN ACCORDANCE WITH AMP SPEC 107-3275
 - ② 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
 - ③ Ni PLATING
 - ④ THIS ITEM MUST BE WHITE
- 5 ELECTRICAL CHARACTERISTICS
- | | |
|-------------------------------|---------------|
| FREQUENCY RANGE: | N/A |
| NOMINAL IMPEDANCE: | N/A |
| INSULATION RESISTANCE: | N/A |
| WORKING VOLTAGE: | N/A |
| DIELECTRIC WITHSTAND VOLTAGE: | N/A |
| CONTACT RESISTANCE: | N/A |
| CENTRE CONTACT: | N/A |
| OUTER CONTACT: | 0.20 mOhm Max |
| VSWR @ xGHz: | N/A |
| INSERTION LOSS xdb: | N/A |
- 6 MECHANICAL CHARACTERISTICS
- | | |
|---------------------------|----------------|
| COUPLING RETENTION FORCE: | N/A |
| CABLE RETENTION FORCE: | N/A |
| DURABILITY: | 500 Cycles Min |
- 7 ENVIRONMENTAL CHARACTERISTICS
- | | |
|------------------------|------------------|
| OPERATING TEMPERATURE: | -65 to +165 DegC |
|------------------------|------------------|

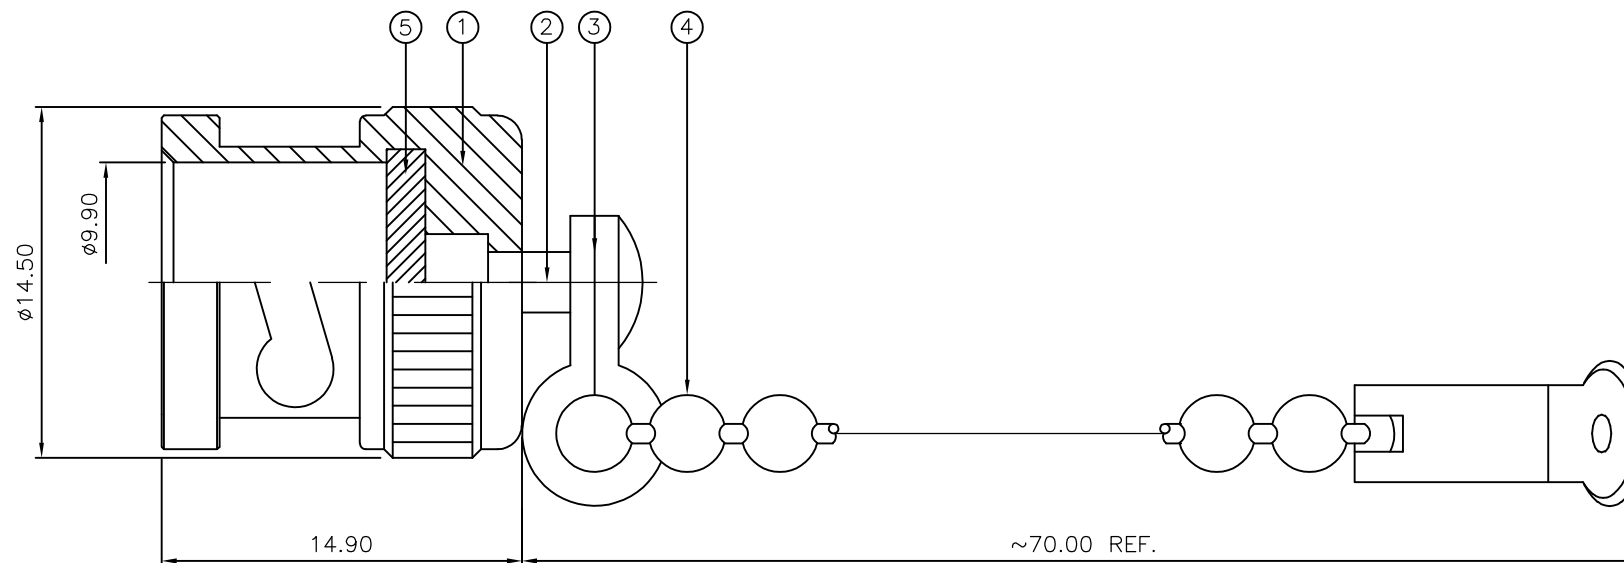

| QTY | QTY PER ASSY | QTY PER ASSY | MATERIAL | DESCRIPTION | ITEM |
|-------------------|--------------|--------------|-----------------|-------------|------|
| 1 | 1 | | SILICONE RUBBER | GASKET | 5 |
| 1 | 1 | | BRASS | CHAIN | 4 |
| 1 | 1 | | STAINLESS STEEL | JOINT | 3 |
| 1 | 1 | | BRASS | RIVET | 2 |
| 1 | 1 | | BRASS | SHELL | 1 |
| 6--0 | 1--0 | | | | |
| | | | | | |
| QUANTITY PER ASSY | | PARTS LIST | | | |

| | | | | | | | | | | | | | | | | |
|--|-----|------------------|----------------|---------|----------------------------|-----------|-----|-------|-----|-------|-----|-------|-----|--------|-----|--------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN | J.SANDWELL | 25JAN06 | STE TE Connectivity | | | | | | | | | | | |
| DIMENSIONS: mm | | CHK | S.PARLOW | 25JAN06 | | | | | | | | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD | F.WHEELER-KING | 25JAN06 | | | | | | | | | | | | |
| <table border="0"> <tr><td>0 PLC</td><td>± -</td></tr> <tr><td>1 PLC</td><td>± -</td></tr> <tr><td>2 PLC</td><td>± -</td></tr> <tr><td>3 PLC</td><td>± -</td></tr> <tr><td>4 PLC</td><td>± -</td></tr> <tr><td>ANGLES</td><td>± -</td></tr> </table> | | 0 PLC | ± - | 1 PLC | | | ± - | 2 PLC | ± - | 3 PLC | ± - | 4 PLC | ± - | ANGLES | ± - | PRODUCT SPEC |
| 0 PLC | ± - | | | | | | | | | | | | | | | |
| 1 PLC | ± - | | | | | | | | | | | | | | | |
| 2 PLC | ± - | | | | | | | | | | | | | | | |
| 3 PLC | ± - | | | | | | | | | | | | | | | |
| 4 PLC | ± - | | | | | | | | | | | | | | | |
| ANGLES | ± - | | | | | | | | | | | | | | | |
| MATERIAL SEE TABLE | | FINISH | - | | BNC PLUG CAP+CHAIN | | | | | | | | | | | |
| | | APPLICATION SPEC | - | | SIZE | A3 | | | | | | | | | | |
| | | WEIGHT | - | | CAGE CODE | 00779 | | | | | | | | | | |
| | | CUSTOMER DRAWING | | | DRAWING NO | C-1337524 | | | | | | | | | | |
| | | SCALE | | | NTS | SHEET | | | | | | | | | | |
| | | | | | 1 OF 1 | REV | | | | | | | | | | |
| | | | | | D | | | | | | | | | | | |