


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/16/11	XXXXXX	INITIAL RELEASE

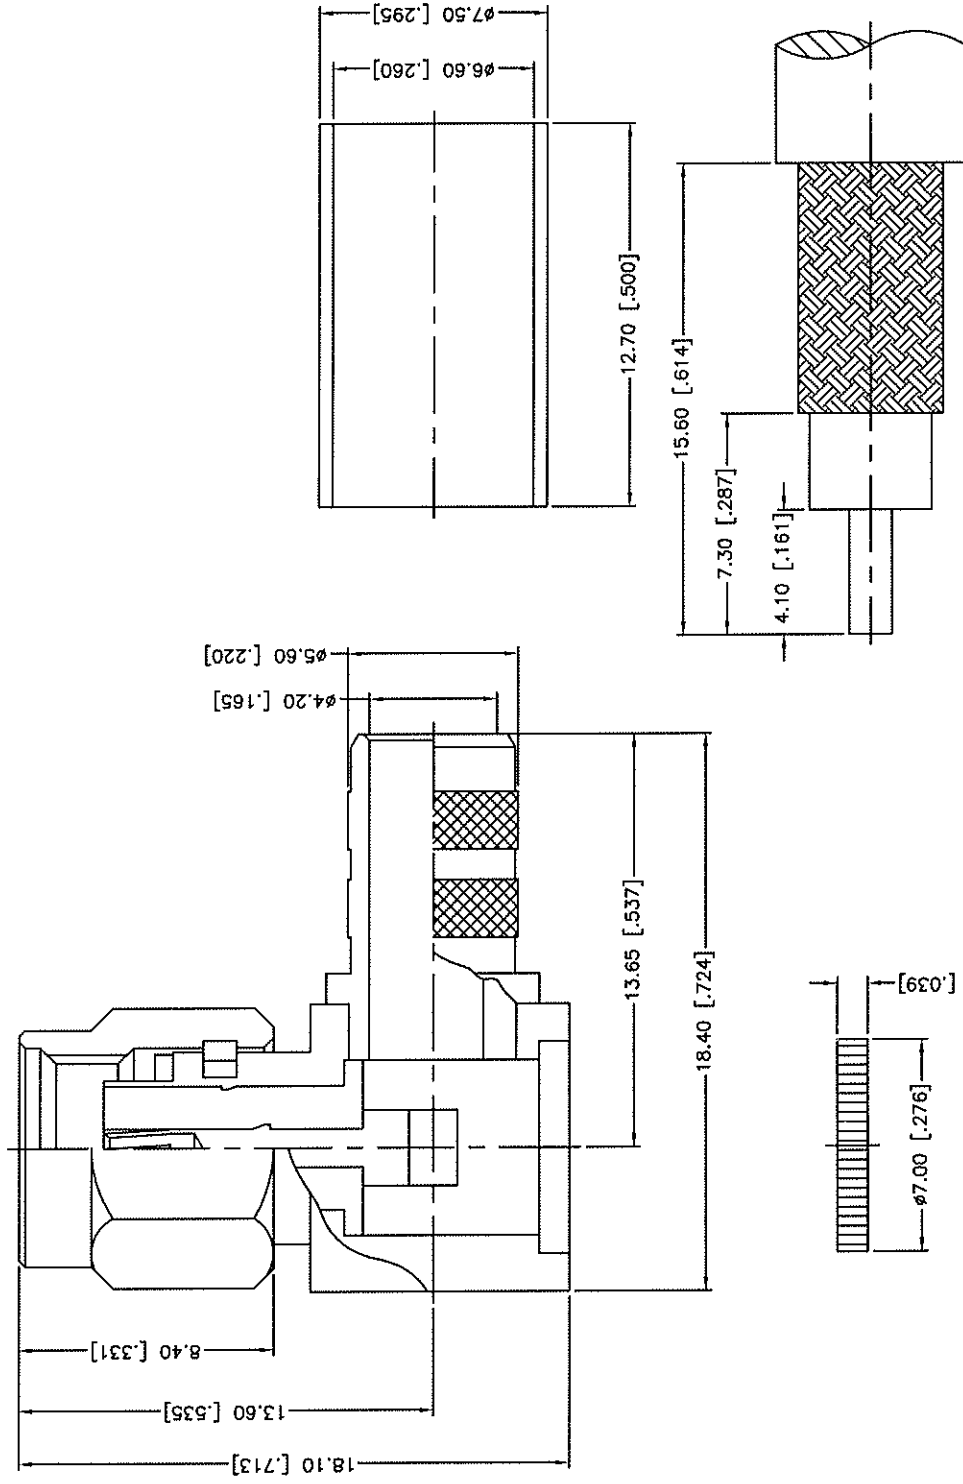


1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CONTACT PIN TO SOLDER

RECOMMENDED
CABLE STRIPPING DIM'S

<p>Amphenol Connex</p> <p>SMA REVERSE POLARITY R/A CRIMP PLUG (FOR RG-8/X, LMR-240)</p>		<p>DATE: 03/16/11</p> <p>APPROVALS: M. ZHANG</p>																																				
<p>PART DESCRIPTION: SMA REVERSE POLARITY R/A CRIMP PLUG (FOR RG-8/X, LMR-240)</p> <p>PART NO.: 132239RP</p>		<p>DRAWN: M. ZHANG</p> <p>CHECKED:</p> <p>ISSUED:</p> <p>SHEET: 1 OF 1</p>																																				
<p>DO NOT SCALE DRAWING</p>		<p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS:</p> <p>0.5 - 8mm ± 0.20mm</p> <p>8 - 30mm ± 0.40mm</p> <p>30 - 120mm ± 0.50mm</p> <p>UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES AND:</p> <p>.020 - .315 ± 0.007"</p> <p>.315 - 1.180 ± 0.015"</p> <p>1.180 - 4.724 ± 0.020"</p>																																				
<table border="1"> <tr> <th>DESCRIPTION</th> <th>MATERIAL</th> <th>FINISH</th> <th>QTY</th> </tr> <tr> <td>8 FERRULE</td> <td>BRASS</td> <td>GOLD</td> <td>1</td> </tr> <tr> <td>7 COVER</td> <td>BRASS</td> <td>GOLD</td> <td>1</td> </tr> <tr> <td>6 GASKET</td> <td>SILICONE</td> <td>RED</td> <td>1</td> </tr> <tr> <td>5 RETAINER RING</td> <td>BERYLLIUM COPPER</td> <td>NATURAL</td> <td>1</td> </tr> <tr> <td>4 CONTACT PIN</td> <td>BERYLLIUM COPPER</td> <td>GOLD</td> <td>1</td> </tr> <tr> <td>3 INSULATOR</td> <td>PTFE</td> <td>NATURAL</td> <td>1</td> </tr> <tr> <td>2 HOUSING WITH HOUSING</td> <td>BRASS</td> <td>GOLD</td> <td>1</td> </tr> <tr> <td>1 SHELL</td> <td>BRASS</td> <td>GOLD</td> <td>1</td> </tr> </table>	DESCRIPTION	MATERIAL	FINISH	QTY	8 FERRULE	BRASS	GOLD	1	7 COVER	BRASS	GOLD	1	6 GASKET	SILICONE	RED	1	5 RETAINER RING	BERYLLIUM COPPER	NATURAL	1	4 CONTACT PIN	BERYLLIUM COPPER	GOLD	1	3 INSULATOR	PTFE	NATURAL	1	2 HOUSING WITH HOUSING	BRASS	GOLD	1	1 SHELL	BRASS	GOLD	1	<p>CONNECTION: C:/CONNEX/132239RP.DWG</p> <p>REV: NC</p> <p>SIZE: A</p> <p>SCALE: NA</p>	
DESCRIPTION	MATERIAL	FINISH	QTY																																			
8 FERRULE	BRASS	GOLD	1																																			
7 COVER	BRASS	GOLD	1																																			
6 GASKET	SILICONE	RED	1																																			
5 RETAINER RING	BERYLLIUM COPPER	NATURAL	1																																			
4 CONTACT PIN	BERYLLIUM COPPER	GOLD	1																																			
3 INSULATOR	PTFE	NATURAL	1																																			
2 HOUSING WITH HOUSING	BRASS	GOLD	1																																			
1 SHELL	BRASS	GOLD	1																																			

REVISIONS	
ISS	ZONE
	DESCRIPTION \ PER REQUEST \ DATE

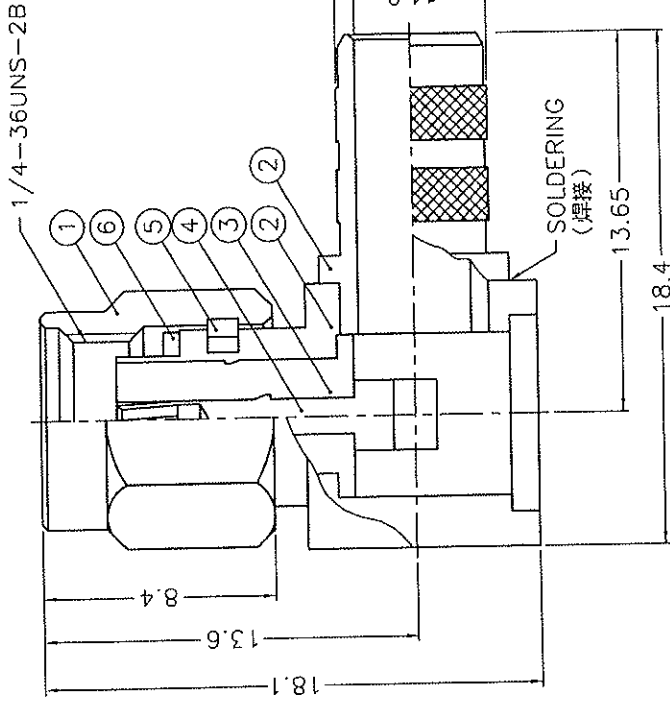

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
 - GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - BERYLLIUM COPPER PER QQ-C-530
 - GOLD PL. 50 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - TEFLON MIL-P-19468
 - JIS H 3250, C 2700

8	FERRULE	NOTE 6	NOTE 2	1	FR-75/66X127	DIMENSIONS ARE IN MILLIMETERS	PART NO.	132239 RP	DATE	08-13-05	Amphenol
7	COVER	NOTE 1	NOTE 2	1	CV-7X1-T	UNLESS OTHERWISE SPECIFIED	APPROVED	Andy	DATE	08-13-05	Donbury, CT, USA-Tainan, Taiwan-Shenzhen, China
6	GASKET	SILICONE	RED	1	GS-6/43X06	TOLERANCES	CHECKED	Rocky	DATE	08-13-05	TITLE
5	RETAINER RING	NATURAL	NATURAL	1	SMA5000-4-B	0.5-6 = ±0.2	DRAWN	ROCKY	DATE	08-13-05	SMA REVERES POLARITY R/A CRIMP
4	CONTACT PIN	NOTE 3	NOTE 4	1	RSMA1112A1-4	6-30 = ±0.4	FILE NO.	F:\DWG\RSMA\1112A1\8X-50\3GT50G-SZ	SCALE	4/1	PLUG(FOR RG-8/X, LMR-240)
3	INSULATOR	NOTE 5	NATURAL	1	RSA-3010-X-3	30-120 = ±0.6	ISSUE	1	DRAWING NO.	RSMA1112A1-3GT50G-8X-50	
2	HOUSING WITH BARREL	NOTE 1	NOTE 2	1	RSA-3010-X-2S-56/42-B	120-315 = ±1	SCALE	4/1	ITEM NO.	611112AAA89GA5F	
1	SHELL	NOTE 1	NOTE 2	1	SMA5000-1-C	315-1000 = ±1.6	SCALE	4/1	ISSUE	1	
NO.	DESCRIPTION	MATERIAL	FINISH	QTY	DRAWING NO.	1000-2000 = ±2.4					