



SCALE 2:1
RECOMMENDED PCB LAYOUT



SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	NONE	DN
2-3	OPEN	2-1

NOTES:
() = Momentary

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A@ 120V AC or 28V DC;
2A@ 250V AC
5. MATERIAL: FIXED TERMINAL & MOVING CONTACT
Copper Alloy w/SILVER PLATING
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
@2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 50,000 make-and-break
cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.

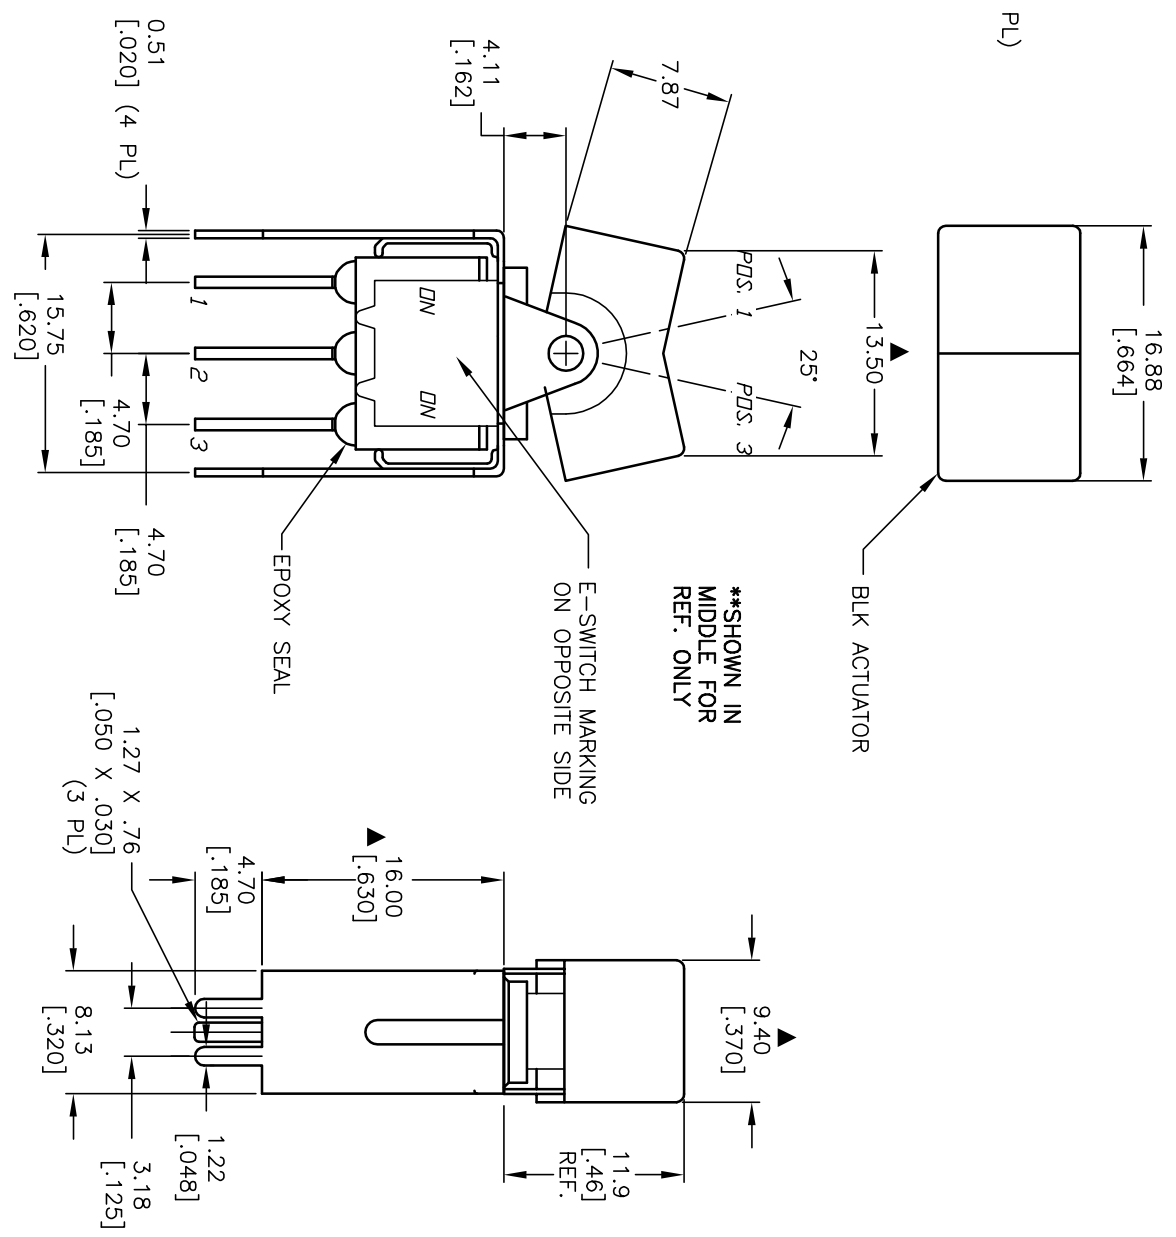

**SHOWN IN MIDDLE FOR REF. ONLY

BLK ACTUATOR

E-SWITCH MARKING ON OPPOSITE SIDE

EPOXY SEAL

REV. A	ECN No. 13344	RELEASED FOR PRODUCTION	8/5/03	AR
		DESCRIPTION	DATE	CHKD

TITLE		SCALE	DATE	DR	DWG	REV
300SP1J1BLKVS3QE		2:1	8/5/03	AR	T311035	A



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED