

(1.27 mm) .050"

FTS SERIES

MICRO LOW PROFILE TERMINAL STRIPS

SPECIFICATIONS



For complete specifications and recommended PCB layouts see www.samtec.com?FTS

HI-TEMP

Insulator Material:
Black Liquid Crystal Polymer
Terminal Material:
Phosphor Bronze
Operating Temp Range:
-55 °C to +125 °C
Plating:
Sn or Au over 50 μ" (1.27 μm) Ni
Current Rating:
3.3 A per pin (1 pin powered per row)
RoHS Compliant:
Yes
Lead-Free Solderable:
Yes
SMT Lead Coplanarity:
.004" (0.10 mm) max

Board Mates:
CLP, FLE
Cable Mates:
FFSD

OPTIONS

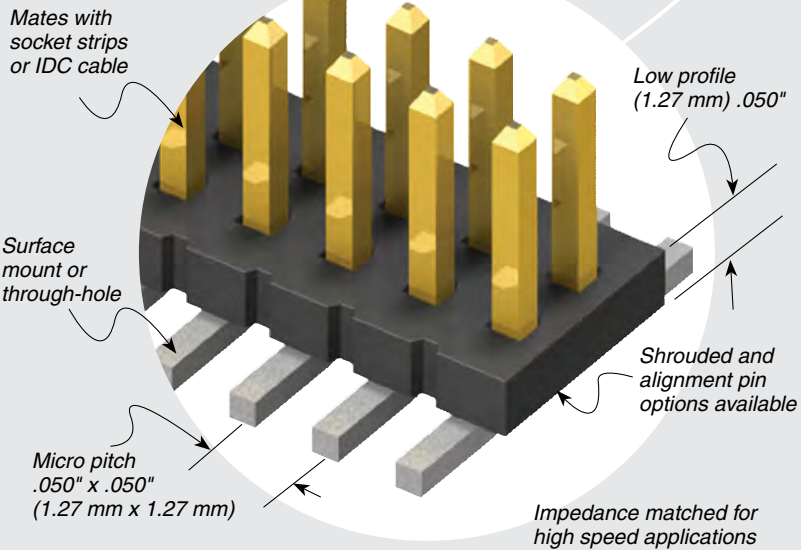

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



ALSO AVAILABLE (MOQ Required)

- Alignment pin
- Contact Samtec.

FTS	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	OTHER OPTION									
		02 thru 50 (except -S & -SA option = 05 thru 46)	<p>-01 = .120" (3.05 mm) Post (Mates with FFSD)</p> <p>-02 = .075" (1.91 mm) Post (Mates with FLE)</p> <p>-03 = .065" (1.65 mm) Post (Mates with CLP)</p>	<p>-F = Gold flash on post, Matte Tin on tail</p> <p>-L = 10 μ" (0.25 μm) Gold on post, Matte Tin on tail</p>	<p>-D = Double Through-hole</p> <p>-DV = Double Vertical SMT</p> <p>-S = Single Through-hole</p> <p>-SV = Single Vertical SMT</p>	<p>(-D & -DV only)</p> <p>-SA = End Shroud with Alignment Pin (05 thru 46 positions. Style -02 & -03 only)</p> <p>-S = End Shroud (05 thru 46 positions. Style -02 & -03 only)</p> <p>-P = Pick & Place Pad (04 positions minimum)</p> <p>-TR = Tape & Reel (-DV only) (Required callout for positions 2 thru 4)</p>									
			<table border="1"> <thead> <tr> <th>LEAD STYLE</th> <th>A</th> </tr> </thead> <tbody> <tr> <td>-01</td> <td>(3.05) .120</td> </tr> <tr> <td>-02</td> <td>(1.91) .075</td> </tr> <tr> <td>-03</td> <td>(1.65) .065</td> </tr> </tbody> </table>		LEAD STYLE	A	-01	(3.05) .120	-02	(1.91) .075	-03	(1.65) .065			
LEAD STYLE	A														
-01	(3.05) .120														
-02	(1.91) .075														
-03	(1.65) .065														
<p>Note: Some lengths, styles and options are non-standard, non-returnable.</p>															