
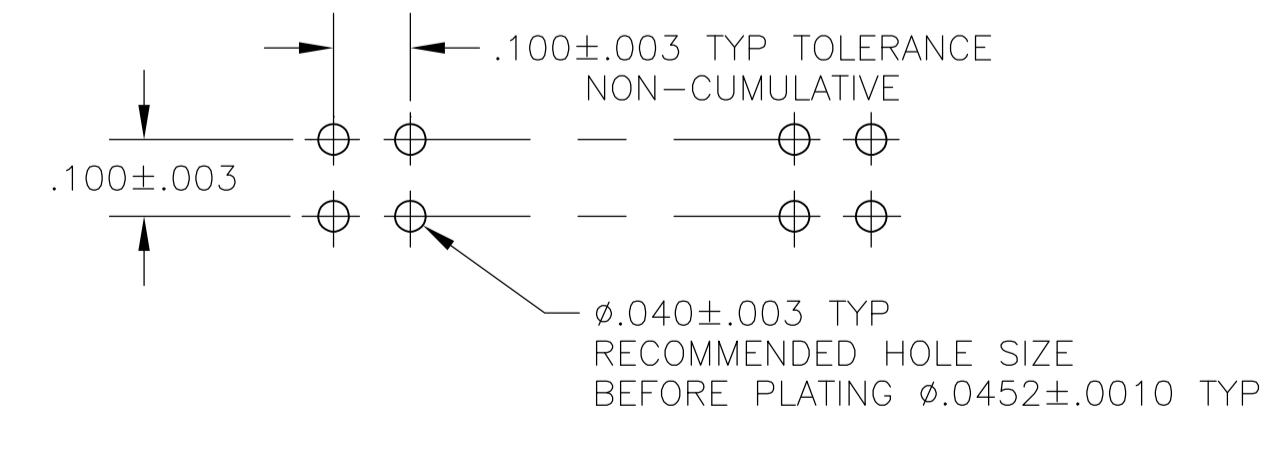


- 1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD.
- 2 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING.
- 3 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 4 RETENTION FEATURES ON SOLDER TAILS, LOCATED AT MANUFACTURERS OPTION.
- 5 FOR 2 POSITION PART ONLY, THE NOTED DIM. IS .184
- 6 $\text{Ø}.020\text{M}$ FOR KINKED TAILS
- 7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINIS

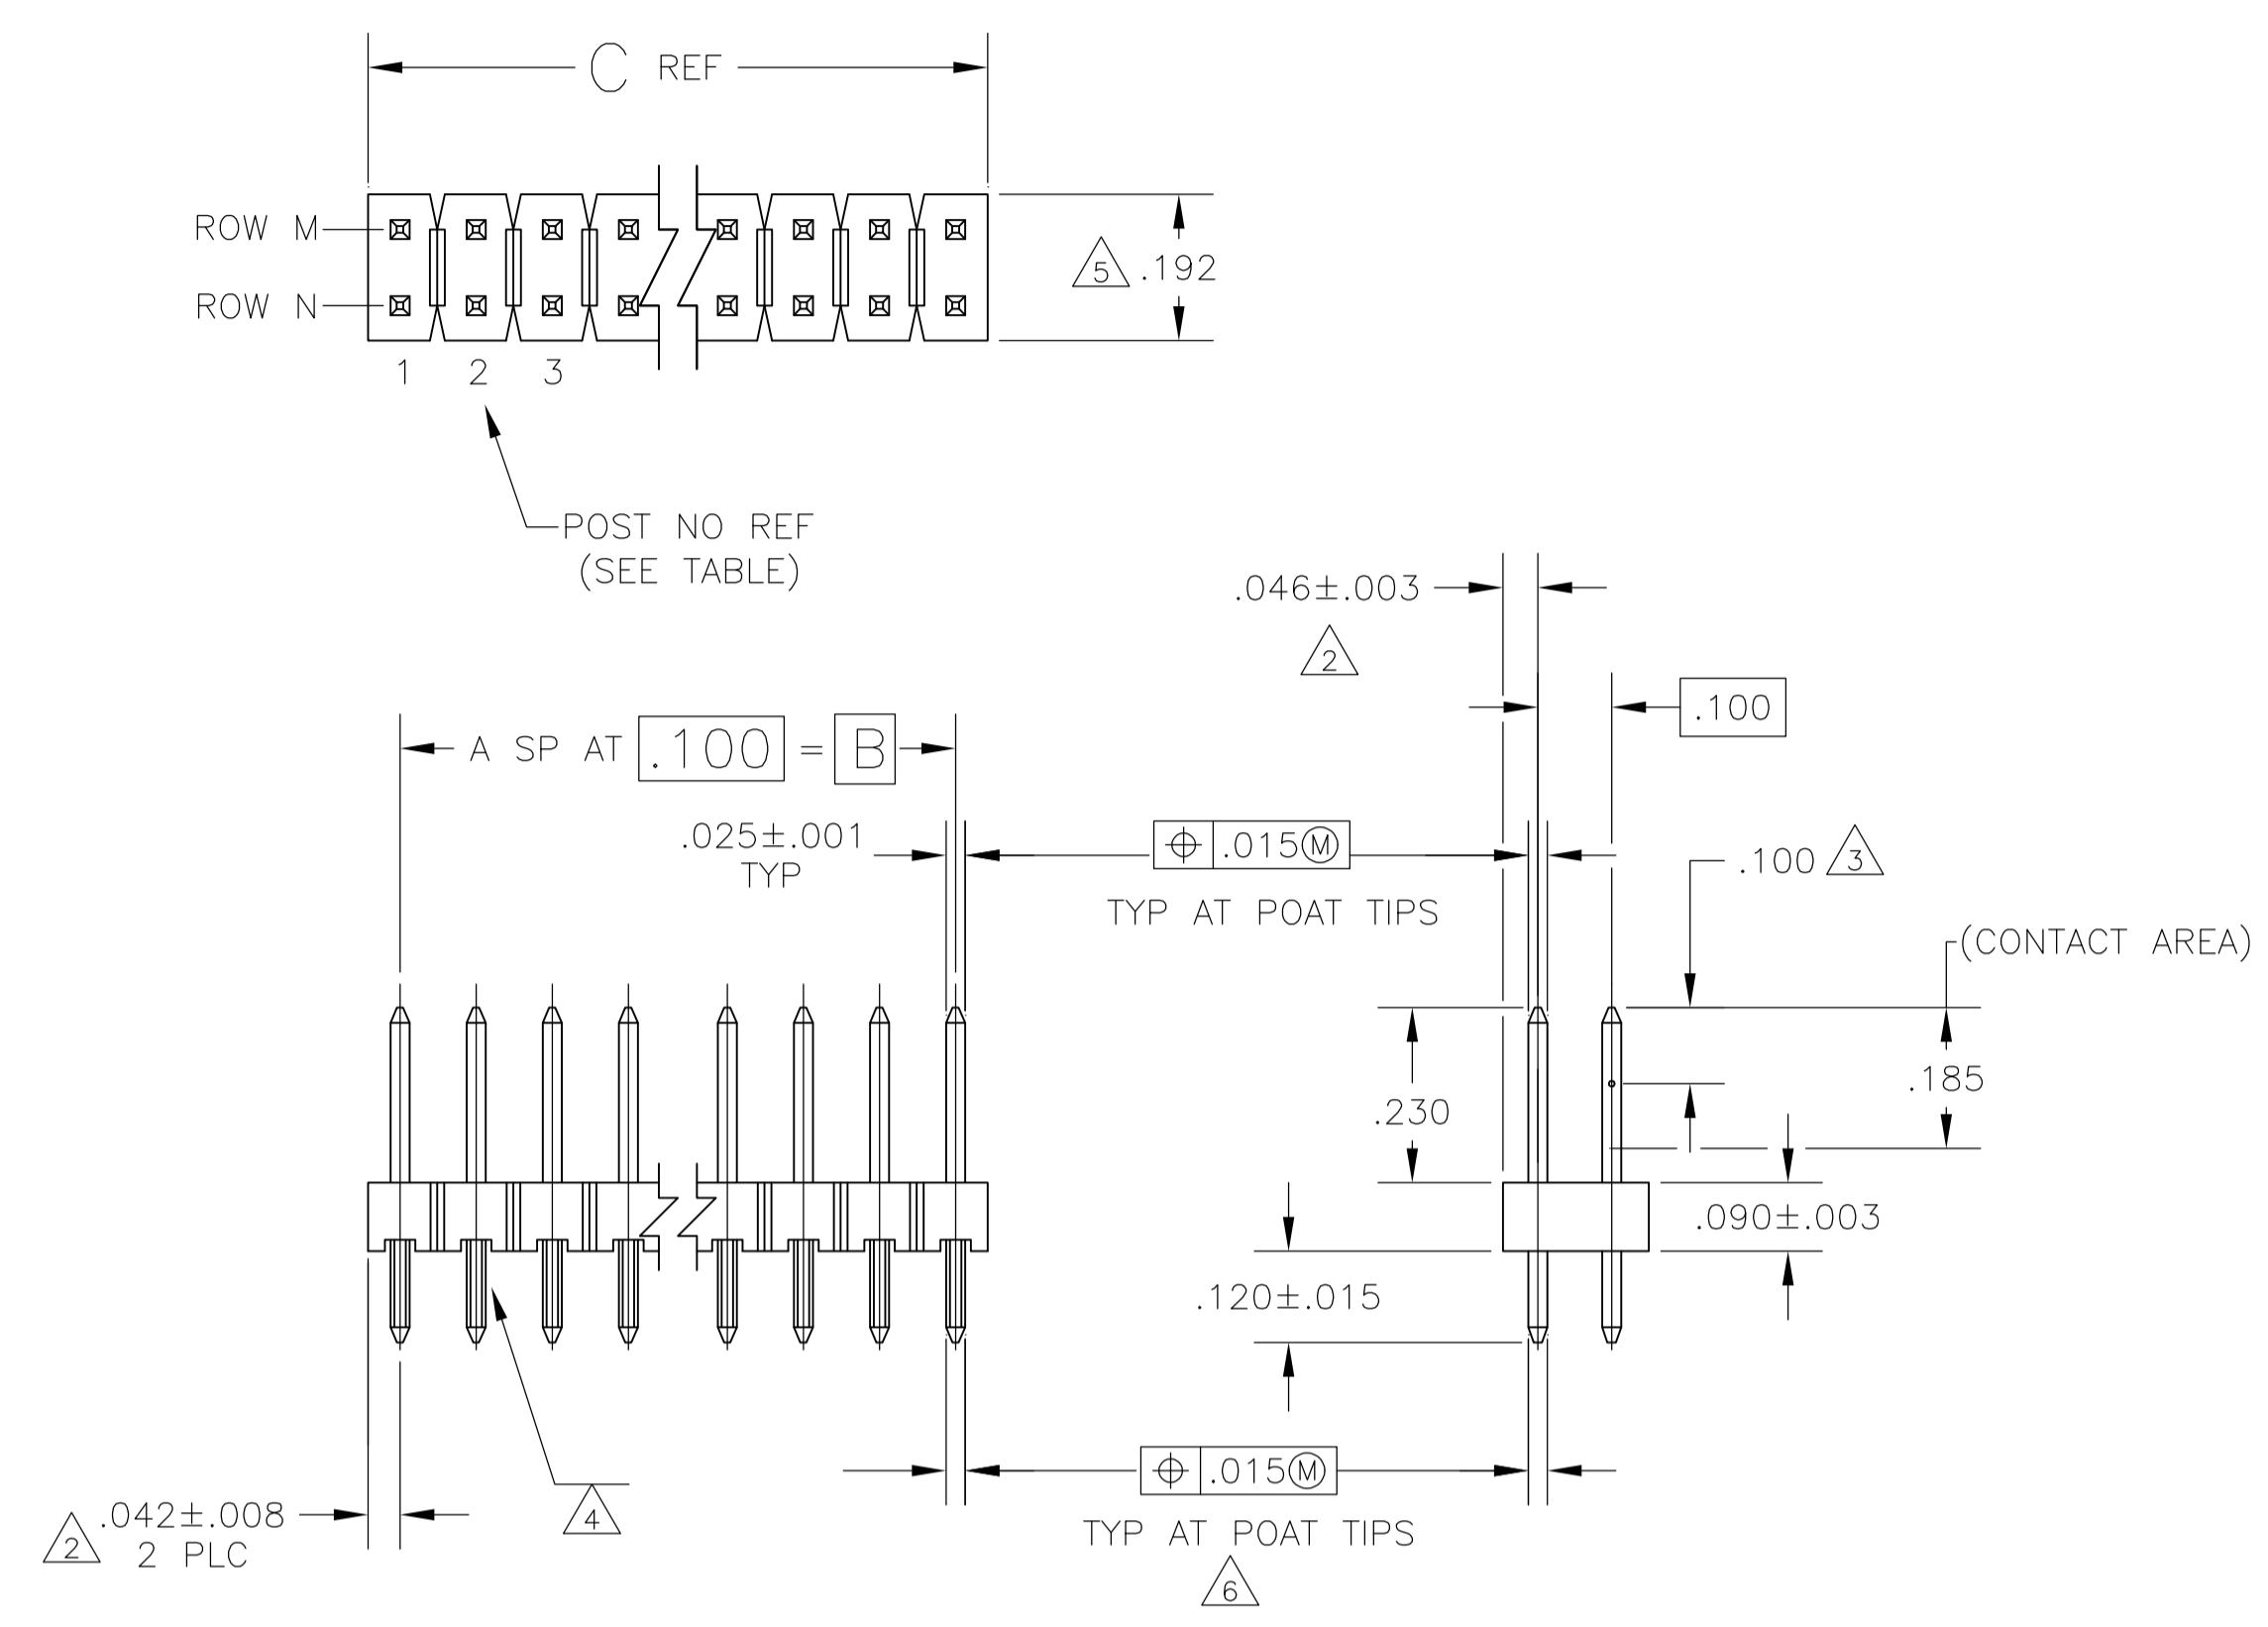

7 OBSOLETE	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
3.084	3.000	30	62	2-104350-1	
3.984	3.900	39	80	2-104350-0	
2.984	2.900	29	60	1-104350-9	
2.484	2.400	24	50	1-104350-8	
1.984	1.900	19	40	1-104350-7	
1.684	1.600	16	34	1-104350-6	
SUPERSEDED BY 6-146269-5					
1.484	1.400	14	30	1-104350-5	
1.384	1.300	13	28	1-104350-4	
1.284	1.200	12	26	1-104350-3	
1.184	1.100	11	24	1-104350-2	
1.084	1.000	10	22	1-104350-1	
.984	.900	9	20	1-104350-0	
7 OBSOLETE	.884	.800	8	18	104350-9
	.784	.700	7	16	104350-8
	.684	.600	6	14	104350-7
	.584	.500	5	12	104350-6
	.484	.400	4	10	104350-5
	.384	.300	3	8	104350-4
	.284	.200	2	6	104350-3
	.184	.100	1	4	104350-2
	.084		2	104350-1	

THIS DRAWING IS A CONTROLLED DOCUMENT. DIN H MOLL 08FEB88

TE Connectivity

NAME: HEADER ASSY, MOD II, BREAKAWAY, DBL ROW, .100X.100 CL., VERT, .025 SQ POSTS, WITH RETENTION FEATURE

SIZE: A1

SCALE: 4:1

SHEET: 1 of 1

REV: M2

RESTRICTED CUSTOMER