


NOTES

Material and finish:
Housings:
 Shells: steel, bright tin plated
 Insulators: glass filled thermoplastic UL94V0
Contacts:
 phosphor bronze, gold plated over nickel on mating end, bright tin plated over nickel on termination end
Brackets: glass filled thermoplastic UL94V0
Rivets: brass, bright tin plated

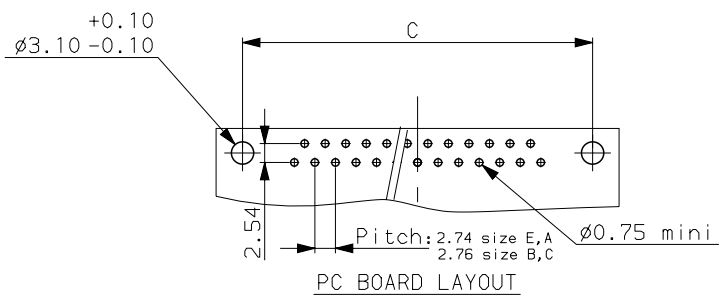

Dimensions are in millimeters

Shell size	Number of contacts	A ^{+0,76} ₀	B ^{+0,25} ₀	C ±0,12	F ^{+0,51} ₀	G ^{+0,25} ₀	H ^{+0,51} ₀	L ^{+0,22} ₀	Part Number
E	09	30.43	16.46	24.99	10.64	6.05	19.02	0.80	DE09S56*T
A	15	38.76	24.54	33.32	10.64	6.05	27.25	0.80	DA15S56*T
B	25	52.65	38.25	47.04	10.64	6.05	41.02	0.80	DB25S56*T
C	37	68.94	54.71	63.50	10.64	6.05	57.45	0.80	DC37S56*T

Plating: 4 --> Flash AU
 Plating: 5 --> 0.75µ AU

c	12/08/04	update P/N	-	--
ISS	DATE	Lastest modification by : M PESSON		MOD N°
Designed by: PESSON		date: 09/06/89	Type of drawing: CLIENT	
Checked by: --		date: --	Released by: --	
TITLE : SOCKET CONNECTORS D SUB. RIGHT ANGLED SPILL WITH PLASTIC BRACKETS				
SCALE	Special mfg: --	MATERIAL: --	N°: --	
1.5	item list n°: --	--		
	General Linear Tolerances: --	General machining surface texture: --	Geometrical Tolerances see NF E 04-552	SHEET 1/1
	FRAMATOME CONNECTORS FRANCE Rue Louis Breguet - BP 05 72024 LE MANS Cedex Tel. 33 (16) 43.84.08.43		This document is the property of FRAMATOME CONNECTORS FRANCE It must not be reproduced or communicated without permission in writing Flow the owners	
FORMAT A3	SOURIAU DRG N°		PROJECT	
	C01-8636-0517		D89D018	