



RECOMMENDED P.C.B. LAYOUT



SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	OFF	DN
2-3,5-6	DPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 3 AMPS @ 120VAC OR 28VDC;
1 AMP @ 250VAC
5. CONTACT MATERIAL:
Silver plated copper Alloy
6. ELECTRICAL LIFE: 30,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. CONTACT RESISTANCE: 20mili-Ohms max. Typical
Initial @2-4VDC
10. OPERATING TEMP.: -30°C to 85°C

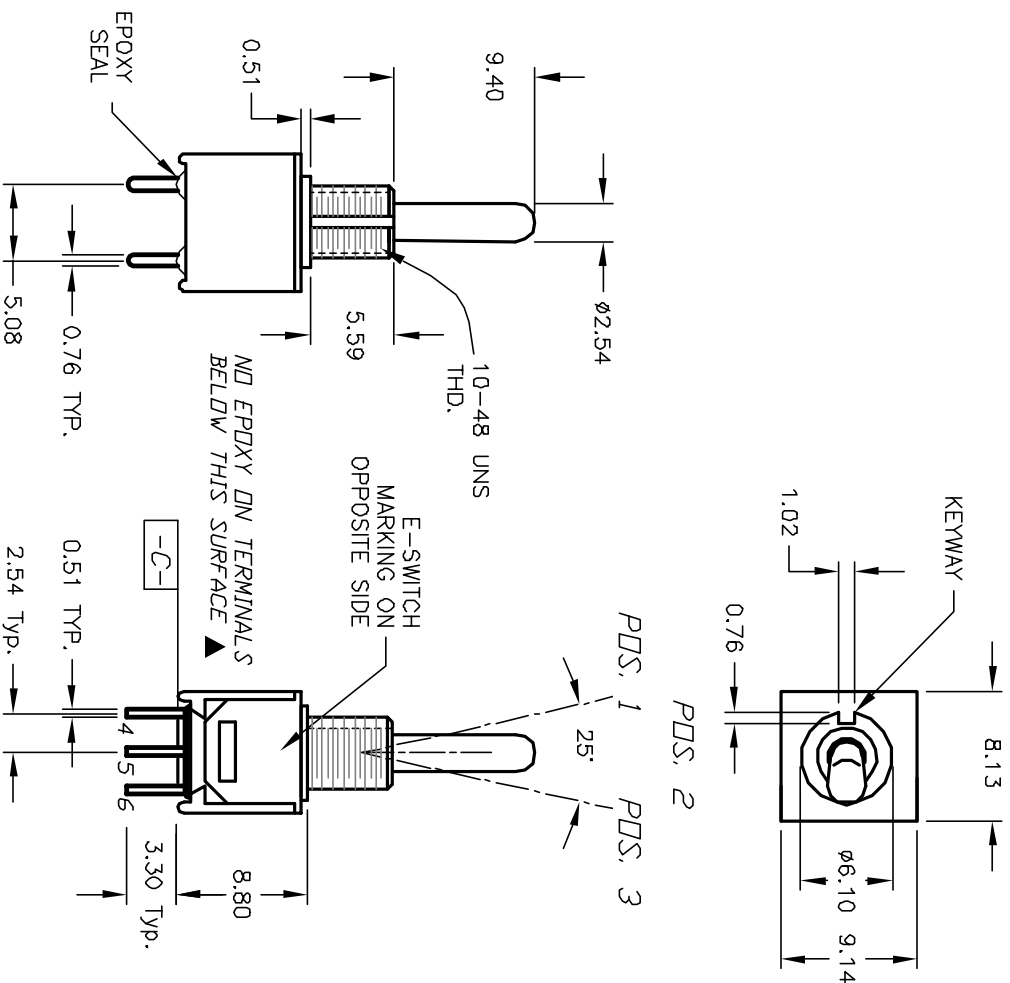

E-SWITCH®

REV.	ECN NO.	DESCRIPTION	DATE	CHKD
A	12885	RELEASED FOR PRODUCTION	3/5/03	CJB

TITLE	SCALE	DATE	DR	DWG	REV
200 MDP-3 T1 B3 M2 Q E	2:1	3/5/03	CJB	T2223050	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED